

Revised Regional Total Maximum Daily Load Evaluation
of Fecal Coliform Bacteria Impairments
In the Lower Mississippi River Basin in Minnesota

Final Report – January 2006

For Submission to:

**U.S. Environmental Protection Agency
Region 5
Chicago, Illinois**

Submitted by:

Minnesota Pollution Control Agency

CONTENTS

<u>Section</u>	<u>Page</u>
EXECUTIVE SUMMARY.....	4
1.0 INTRODUCTION AND DISCUSSION OF ASSESSMENT DATA.....	7
2.0 BASIN CHARACTERISTICS.....	16
3.0 DESCRIPTION OF APPLICABLE WATER QUALITY STANDARDS AND ASSESSMENT PROCEDURES.....	19
3.1 APPLICABLE MINNESOTA WATER QUALITY STANDARDS.....	19
3.2 IMPAIRMENT ASSESSMENT.....	20
3.3 MPCA NON-DEGRADATION POLICY.....	21
4.0 DESCRIPTION OF FECAL COLIFORM BACTERIA AND ITS SOURCES.....	22
5.0 LOAD ALLOCATIONS (LA), WASTELOAD ALLOCATIONS (WLA), and MARGINS OF SAFETY (MOS)	
5.1 APPROACH TO ALLOCATIONS NEEDED TO SATISFY THE TMDL.....	28
5.2 TMDL ALLOCATIONS FOR INDIVIDUAL IMPAIRED REACHES.....	32
5.3 IMPACTS OF GROWTH ON ALLOCATIONS.....	114
6.0 MARGIN OF SAFETY.....	115
7.0 SEASONAL VARIATION.....	115
8.0 MONITORING PLAN	
8.1 GOALS OF THE MONITORING PLAN.....	115
8.2 MONITORING ACTIVITIES, SCHEDULE AND RESPONSIBILITY.....	115
9.0 IMPLEMENTATION	
9.1 CURRENT IMPLEMENTATION THROUGH BASINWIDE SOURCE REDUCTION STRATEGIES.....	116
9.2 REVIEW AND REVISION OF CURRENT IMPLEMENTATION PLAN...	119

10.0	REASONABLE ASSURANCE	
10.1	EVIDENCE OF BMP IMPLEMENTABILITY.....	120
10.2	NON-REGULATORY, REGULATORY, AND INCENTIVE-BASED APPROACHES.....	121
11.0	PUBLIC PARTICIPATION	
11.1	DESCRIPTION OF PUBLIC PARTICIPATION PROCESSES.....	121
12.0	REFERENCES.....	122

FIGURES

<u>Figure</u>		<u>Page</u>
Figure 1.1	Lower Mississippi River Basin Fecal Coliform Impairments.....	9
Figure 1.2	Assessment Data for Straight River; Maple Cr. to Crane Cr.....	14
Figure 1.3	Assessment Data for Logan Branch Whitewater River.....	14
Figure 1.4	Assessment Data for Root River; Thompson Cr. to Miss. R.....	15

TABLES

<u>Table</u>		<u>Page</u>
Table 1.1	Lower Mississippi River Basin Impaired Reach Descriptions and Assessment Summaries.....	10
Table 2.1	Land Use/Land Cover for Lower Mississippi Basin Impaired Reach Watersheds.....	17

Section 5.2 contains the following tables for each impaired reach:

- Wastewater Treatment Facilities
- Livestock Facilities with NPDES Permits
- Municipal Separate Storm Sewer System (MS4) Communities
- Monthly Fecal Coliform Loading Capacities and Allocations

APPENDICES:

Appendix A:	Loading Capacity Determination
Appendix B:	U.S. District Court Order
Appendix C:	Letter from USEPA
Appendix D:	E-mail from USEPA
Appendix E:	Responses to Comments Received During Public Notice Period

Executive Summary

In 2002, a report titled *Regional Total Maximum Daily Study of Fecal Coliform Bacteria Impairments in the Lower Mississippi River Basin in Minnesota* was submitted by the Minnesota Pollution Control Agency (MPCA) to the U.S. Environmental Protection Agency (EPA). The purpose of the study and report submittal was to meet requirements of the federal Clean Water Act (CWA) for 20 stream and river reaches in the Lower Mississippi and Cedar river basins that had been listed as impaired for swimming use due to fecal coliform levels that violated Minnesota water quality standards. The study described the magnitude of the problem and provided direction for improving water quality at the listed reaches, as well as in many other streams and rivers that had not been formally assessed but are believed to exhibit similar water quality conditions. The report was approved by the EPA in November 2002, although the approval was challenged by the Minnesota Center for Environmental Advocacy (MCEA). Despite the legal challenge, a wide range of efforts to reduce fecal coliform bacteria levels in the streams and rivers of the basin have been undertaken based on an implementation plan developed subsequent to the study. The 2002 TMDL report and implementation plan are available at:
<http://www.pca.state.mn.us/water/tmdl/index.html#finaltmdl>

In June of 2005, ruling on the legal challenge from the MCEA, the United States District Court for Minnesota remanded the total maximum daily load (TMDL) report to the EPA for revision “in accordance with the requirements of the CWA and the regulations set forth thereunder.” Specifics of the order included the following (see Appendix B for complete court order).

- The revised TMDL shall be established at a level necessary to implement the applicable water quality standards for each reach impaired with fecal coliform contamination.
- The revised TMDL shall contain a margin of safety that accounts for lack of knowledge concerning the relationship between effluent limitations and water quality.
- The revised TMDL shall properly account for straight pipe septic systems in the wasteload allocation of the TMDL.
- The State of Minnesota is allowed 90 days from the date of entry of final judgment in this case to give public notice of, and to seek comment on, a proposed amended or replacement Regional TMDL Evaluation of Fecal Coliform Bacteria Impairments in the Lower Mississippi River Basin in Minnesota. In the event that the State of Minnesota does not give public notice of such proposed TMDL within this 90-day period, within 30 days thereafter, EPA shall establish a replacement TMDL for the reaches that have been added to the 303(d) list, consistent with MPCA’s representations made at oral argument on this matter.

- The existing SE TMDL shall remain in force and effect pending completion of the recalculated TMDL.

Prior to the court order, the MPCA had been working on revisions in two other areas. First, a number of stream/river reaches have been added to the impaired waters list since the original report. This revised report addresses 39 reaches. Secondly, municipal separate storm sewer systems (MS4's) and livestock facilities that are issued NPDES permits, will be included in the wasteload allocation, rather than the load allocation, portion of the TMDL.

In order to meet the provisions of the court order, the approach in this revised report is somewhat different from that taken in the original. In particular, fecal coliform loading capacities have been calculated for each individual impaired reach, and those capacities are allocated among point sources (wasteload allocation), nonpoint sources (load allocation), and a margin of safety. A loading capacity (i.e. TMDL) is the product of streamflow at each impaired reach and the monthly fecal coliform water quality standard. Five flow zones, ranging from low flow to high flow are utilized, so that the entire range of conditions are accounted for in the TMDL. The loading capacity and allocation vary by impaired reach, and by flow zone for a given reach.

Due to the nature of the court order, this revised TMDL focuses more on the fecal coliform loading capacity and general allocations necessary to meet water quality standards at individual impaired river or stream reaches, than on precise loading reductions that may be required from specific sources. Upon approval of this revised TMDL, a public process for reviewing and updating the current implementation plan, including source-specific load reduction estimates, will be initiated. It is anticipated that many of the current implementation goals and strategies will continue.

The 39 stream reaches listed as impaired for swimming designated use (primary contact recreation) under Section 303(d) of the Clean Water Act are all within the Upper Mississippi River Basin, Lower Portion, and the Cedar River Basin. These river basins are collectively referred to as the Lower Mississippi River Basin in this document.

The Lower Mississippi River Basin in southeastern Minnesota is endowed with a rich variety of landscapes and land uses. Landscapes range from the hills and bluffs of the Driftless Area ecoregion close to the Mississippi River, where land use remains relatively varied and cold-water streams frequently support trout, to the prairie landscape on the western side of the basin which is dominated by row-crop agriculture and hog production. The entire 7,266 square mile region is drained by a network of 11,556 miles of rivers and streams. These streams differ significantly in size, condition of the aquatic environment, and economic uses of the water resource.

The recreational potential offered by the region's rivers and streams is high for such activities as fishing, boating and hiking, but limited by various forms of aquatic and terrestrial habitat degradation. Water quality monitoring over several decades has shown widespread exceedances of state and federal water quality standards throughout the basin

for fecal coliform bacteria. This problem adversely affects the recreational suitability of the area's streams. The sources of this problem number in the thousands and are widely distributed over the rural, suburban, and urban landscape. Sources pertinent to fecal coliform include noncompliant residential septic systems, unprotected feedlots or manured fields, and pet waste that enter surface water through urban stormwater runoff.

1.0 INTRODUCTION AND DISCUSSION OF ASSESSMENT DATA

Section 303(d) of the Clean Water Act (CWA) provides authority for completing Total Maximum Daily Loads (TMDLs) to achieve state water quality standards and/or designated uses. A TMDL is a calculation of the maximum amount of pollutant that a water body can receive and still meet water quality standards and/or designated uses. It is the sum of the loads of a single pollutant from all contributing point and nonpoint sources. TMDLs must include the following eight elements to be approved by the U.S. Environmental Protection Agency (EPA):

The TMDL must:

1. Be designed to implement applicable water quality criteria;
2. Include a total allowable load, as well as individual waste load allocations;
3. Consider the impacts of background pollutant contributions;
4. Consider critical environmental conditions;
5. Consider seasonal environmental variations;
6. Include a margin of safety;
7. Provide opportunity for public participation; and
8. Have a reasonable assurance that the TMDL can be met.

In general, the TMDL is developed according to the following relationship:

$$\text{TMDL} = \text{WLA} + \text{LA} + \text{MOS}$$

Where:

TMDL =	Total Maximum Daily Load (may be seasonal, for critical conditions, or other constraints.)
WLA =	Waste Load Allocation (point source)
LA =	Load Allocation (nonpoint source)
MOS =	Margin of Safety (may be implicit and factored into conservative WLA or LA, or explicit.)

Sources that are part of the waste load allocation, with the exception of “straight-pipe” septic systems, are largely controlled through National Pollutant Discharge Elimination System (NPDES) permits. Load allocation sources are controlled through a variety of regulatory and non-regulatory efforts at the local, state, and federal level.

This document provides the information used to develop TMDLs for 39 impaired stream reaches on Minnesota’s 2004 303(d) list that lie within the Lower Mississippi River Basin and the Cedar River Basin within Minnesota. These reaches were listed as impaired for failure to meet their swimming designated beneficial uses due to excessive fecal coliform concentrations. Figure 1 shows these reaches, along with other impairments (e.g. turbidity), and other reaches.

The protocol for this assessment is outlined in MPCA “Listing Methodology” publications found at: <http://www.pca.state.mn.us/water/tmdl/index.html#support>. The applicable water body classifications and water quality standards are specified in Minnesota Rules Chapter 7050. Minn. R. ch. 7050.0407 lists water body classifications and Minn. R. ch. 7050.0222, subp. 5 lists applicable water quality standards for the impaired reaches. Assessment summary information for the 39 reaches is listed in Table 1.1. The assessment protocol includes pooling of data by month over a 10-year period. Thirty-five of the reaches had two or more months with a least five fecal coliform observations (i.e. water samples). Of these 35 reaches, the geometric mean water quality standard of 200 orgs./100ml was violated in at least two months for all but one reach, where it was violated once. Four reaches did not have any months with five or more fecal coliform observations. However, these reaches were included on the impaired waters list due to violations of the “single sample” standard of 400 or 2000 orgs./100 ml, depending on the surface water classification.

Figures 1.2 - 1.4 are graphical examples of the data used in the assessments for three of the impaired reaches. The highly variable nature of individual fecal coliform observations is apparent (i.e. the need to use logarithmic scaling). Even the geometric mean values vary a great deal between months and among sites. The 2002 TMDL report documented monthly geometric means ranging from less than 200 orgs./100ml to over 2000 orgs./100ml for the stream/river reaches assessed at that time. There are a number of reasons for this variability including weather/climate effects, differences in watershed terrain and land use, the nature and distribution of sources relative to an impaired reach, and the size and other characteristics of the stream or river. Additionally, the data used in the assessments of the 39 impaired reaches came from a variety of monitoring programs. A program more focused on storm event runoff monitoring may tend to produce data with higher fecal coliform concentrations than a program collecting samples on a set or random schedule. Nevertheless, the number of months where the water quality standard is violated (Table 1.1) and the magnitude of violations, suggest serious water quality impairments that will require substantial efforts to remedy. Completion of this revised TMDL should allow clean-up efforts already underway to continue, and may also result in new and different remediation approaches.

Ideally, sufficient data would exist to calculate current actual fecal coliform loads to compare directly to the TMDLs, which would allow for load reduction projections. However, the amount of data required for load calculations is much greater than that required for simple impairment assessment. General reduction estimates are included in the current implementation plan and will be reviewed and possibly revised following approval of this TMDL.

Figure 1.1: Lower Mississippi River Basin Water Quality Impairments

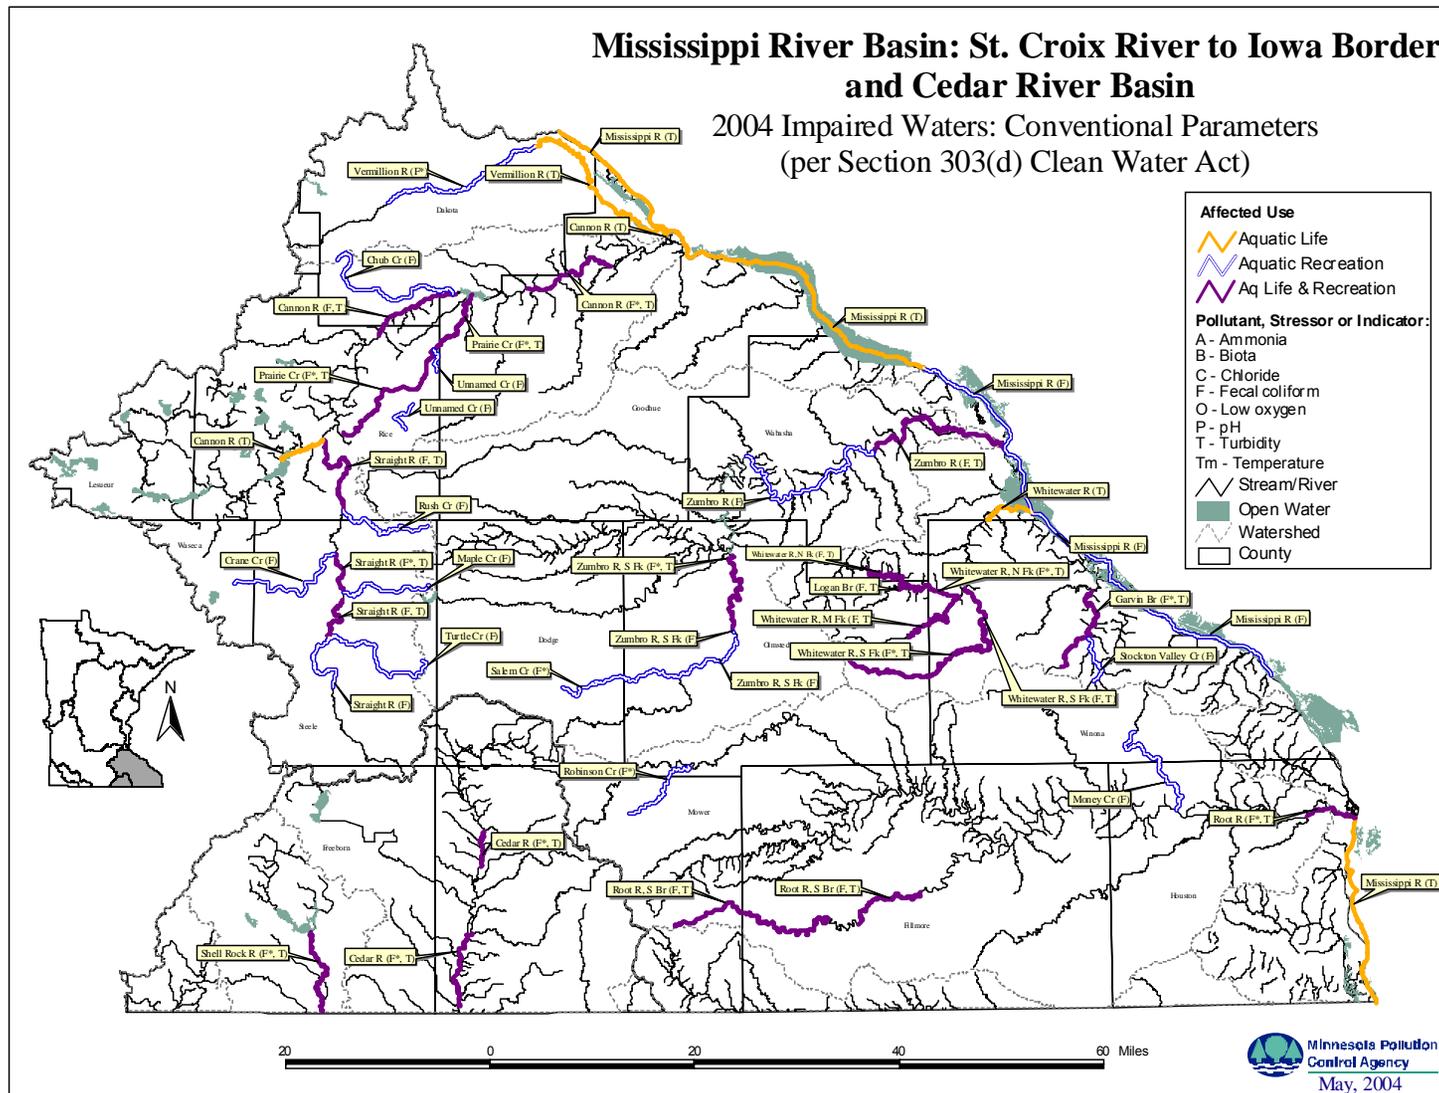


Table 1.1. Lower Mississippi Basin Impaired Reach Descriptions and Assessment Summaries

Impaired Reach	Year Listed	Assessment Unit ID	Reach Length (miles)	Monitoring Stations Used in Assessment	Obs.	# months with ≥ 5 obs.	# months exceeding geometric mean of 200 orgs./100ml	Years of Data
Vermillion River; S Br Vermillion R to the Hastings Dam	96	07040001-506	11.51	Vermillion River 2.7 (MetC), 05346000	322	8	6	85-95
Vermillion River; Below trout stream portion to South Br Vermillion R	94	07040001-507	8.96	S000-896 (VR-32.5), 05345000	84	8	3	83-93
Cannon River; Pine Cr to Belle Cr	94	07040002-502	11.29	S000-003 (CA-13)	73	8	2	83-93
Straight River; Maple Cr to Crane Cr	94	07040002-503	5.43	S000-047 (ST-18)	44	7	6	88-93
Prairie Creek; Headwaters to Cannon R (Lk Byllesby)	94	07040002-504	26.02	S001-186 (PRA-0.5), S001-197 (PRA-1.5), S001-198 (PRA-2.6)	38	2	2	89-93
Rush Creek; Headwaters to Straight R	02	07040002-505	12.41	S000-502	23	3	3	99-00
Cannon River; Northfield Dam to Lk Byllesby inlet	04	07040002-509	10.21	S001-280 (MS318), S001-582	17	0	na	98,01,02
Unnamed Creek; Headwaters to Prairie Cr	02	07040002-512	2.72	S001-240	20	3	3	97-98
Unnamed Tributary to Prairie Creek; Unnamed Cr to Unnamed Cr	02	07040002-513	4.69	S001-246	15	3	3	1998
Straight River; Rush Cr to Cannon R	02	07040002-515	12.68	S003-627	24	4	2	99-00

Impaired Reach	Year Listed	Assessment Unit ID	Reach Length (miles)	Monitoring Stations Used in Assessment	Obs.	# months with ≥ 5 obs.	# months exceeding geometric mean of 200 orgs./100ml	Years of Data
Crane Creek; Headwaters (Watkins Lk) to Straight R	02	07040002-516	15.47	S003-009	26	5	4	99-00
Straight River; CD #25 to Turtle Cr	02	07040002-517	10.45	S001-343	24	4	2	99-00
Turtle Creek; Headwaters to Straight R	02	07040002-518	16.5	S003-628	24	4	4	99-00
Maple Creek; Headwaters to Straight R	02	07040002-519	11.73	S003-011	27	5	4	99-00
Chub Creek; Headwaters to Cannon R	04	07040002-528	19.51	S001-666 (CHB23), S001-670 (CHB3), S001-668 (CHB47), S001-669 (CHBRD)	132	5	5	99-00
Straight River; Turtle Cr to Owatonna Dam	04	07040002-535	7.4	S003-015	11	0	na	00-02
Whitewater River, South Fork; Headwaters to trout stream portion	94	07040003-505	20.37	S000-288 (WWR-26)	74	8	6	83-93
Whitewater River, South Fork; trout stream portion above N Fk Whitewater R	02	07040003-512	11.24	SWR: not yet in STORET, from GJohnson spreadsheet	56	3	3	00-02
Whitewater River, Middle Fork; trout stream portion	02	07040003-514	12.1	MWR: not yet in STORET, from GJohnson spreadsheet	53	3	3	00-02
Garvin Brook; Class 1B,2A,3B portion	94	07040003-542	13.99	S000-828 (GB-4.5)	74	8	6	83-93

Impaired Reach	Year Listed	Assessment Unit ID	Reach Length (miles)	Monitoring Stations Used in Assessment	Obs.	# months with ≥ 5 obs.	# months exceeding geometric mean of 200 orgs./100ml	Years of Data
Logan Branch; End trout stream portion to North Fk Whitewater R	02	07040003-536	10.1	LOG: not yet in STORET, from GJohnson spreadsheet	53	3	3	00-02
Whitewater River, North Fork; Unnamed Cr to Unnamed Cr (below Class 7)	02	07040003-553	7.65	CSP: not yet in STORET, from GJohnson spreadsheet	53	3	3	00-02
Whitewater River, North Fk; Unnamed Cr to Mid Fk Whitewater R	96	07040003-554	10.49	05376000	30	2	1	85-93
Stockton Valley Creek; Trout stream portion to Garvin Br	02	07040003-559	6.38	SVC: not yet in STORET, from GJohnson spreadsheet	55	3	3	00-02
Zumbro River; West Indian Cr to Mississippi R	04	07040004-501	23.43	S000-816	10	2	2	2002
Zumbro River; Cold Cr to West Indian Cr	04	07040004-502	23.4	S000-818, S000-819, S001-905	29	2	2	2002
Salem Creek; Lower 15 miles (Class 2C portion) to South Fk Zumbro R	94	07040004-503	17.28	S001-191 (SAL-7.2), S001-206 (SAL-9.1), S001-207 (SAL-9.9)	35	3	3	89-93
Zumbro River, South Fk; Cascade Cr to Zumbro Lk	94	07040004-507	12.42	S000-268 (ZSF-5.7)	74	8	3	83-93
Zumbro River, South Fork; Silver Lk Dam to Cascade Cr	04	07040004-533	0.19	S000-334	18	3	3	2001

Impaired Reach	Year Listed	Assessment Unit ID	Reach Length (miles)	Monitoring Stations Used in Assessment	Obs.	# months with ≥ 5 obs.	# months exceeding geometric mean of 200 orgs./100ml	Years of Data
Zumbro River, South Fork; Bear Cr to Oakwood Dam	04	07040004-535	0.53	S002-032	18	3	3	2001
Zumbro River, South Fork; Salem Cr to Bear Cr	04	07040004-536	8.67	S002-033	18	3	3	2001
Root River; Thompson Cr to Mississippi R	94	07040008-501	5.73	S000-065 (RT-3)	73	8	6	83-93
Robinson Creek; Headwaters to N Br Root R	94	07040008-503	10.35	S001-138 (ROB-0.03), S001-189 (ROB-0.15), S001-190 (ROB-0.4)	53	8	5	87-93
Money Creek; End of trout stream portion to Root R	04	07040008-521	16.89	S001-820 (Zephyr), S003-623 (SS-3)	10	0	na	2002
Root River, South Branch; Canfield Cr to Willow Cr	04	07040008-555	11.37	S001-320	18	0	na	99-02
Root River, South Branch; Headwaters to Class 1B,2A,3B	04	07040008-586	25.22	S001-318, S001-539, S001-945	32	3	3	99-01
Cedar River; Rose Cr to Woodbury Cr	98	07080201-501	10.25	S000-136 (CD-10)	62	8	4	86-94
Cedar River; Roberts Cr to Upper Austin Dam	98	07080201-502	4.84	S000-137 (CD-24)	63	8	4	86-94
Shell Rock River; Albert Lea Lk to Goose Cr	94	07080202-501	11.83	S000-084 (SR-1.2)	75	8	8	83-93

Figure 1.2. Assessment Data for Straight River; Maple Creek to Crane Creek (AUID: 07040002-503)

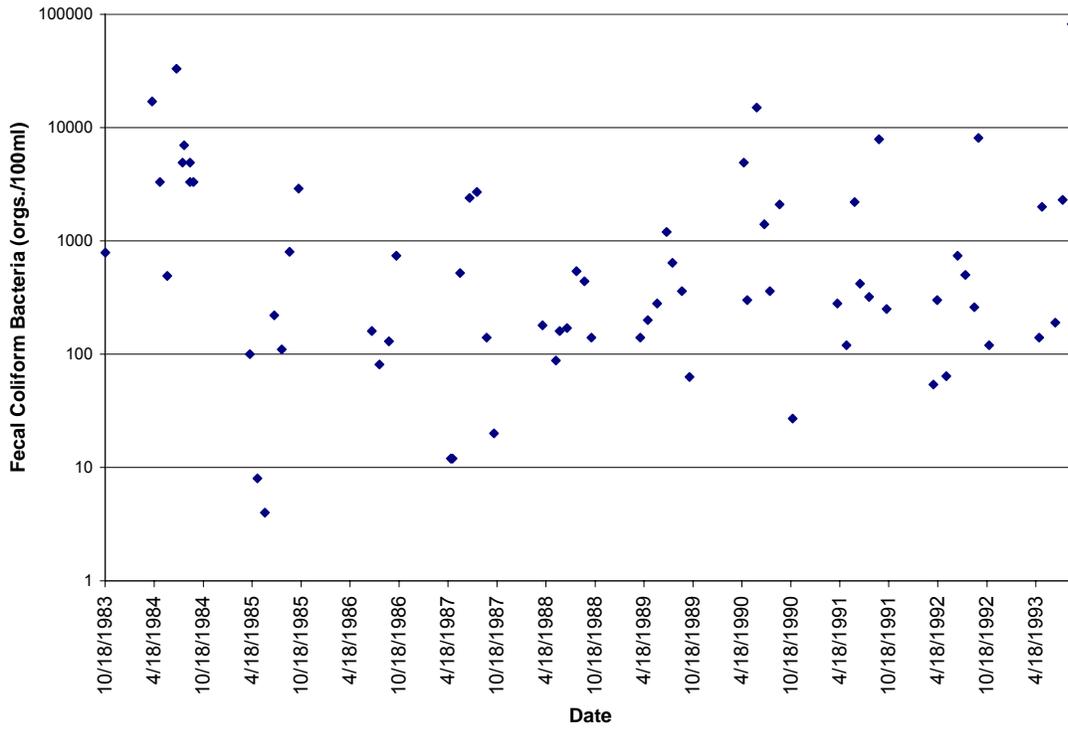


Figure 1.3. Assessment Data for Logan Branch Whitewater River (AUID: 07040003-536)


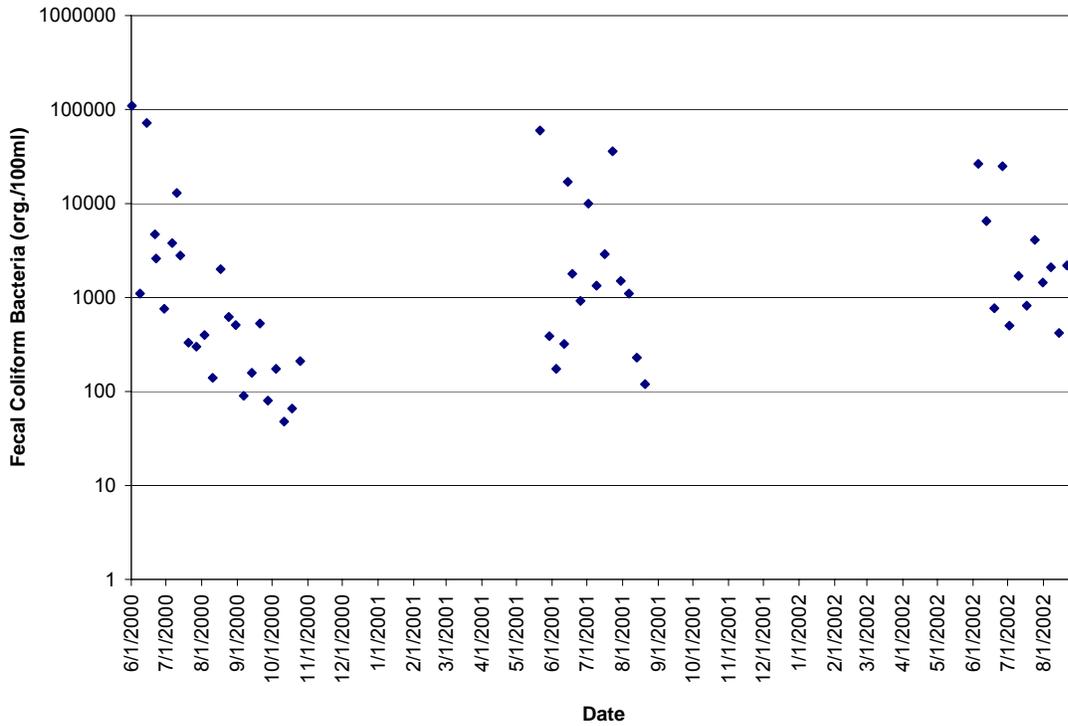


Figure 1.4. Assessment Data for Root River; Thompson Creek to Mississippi River (AUID: 07040008-501)

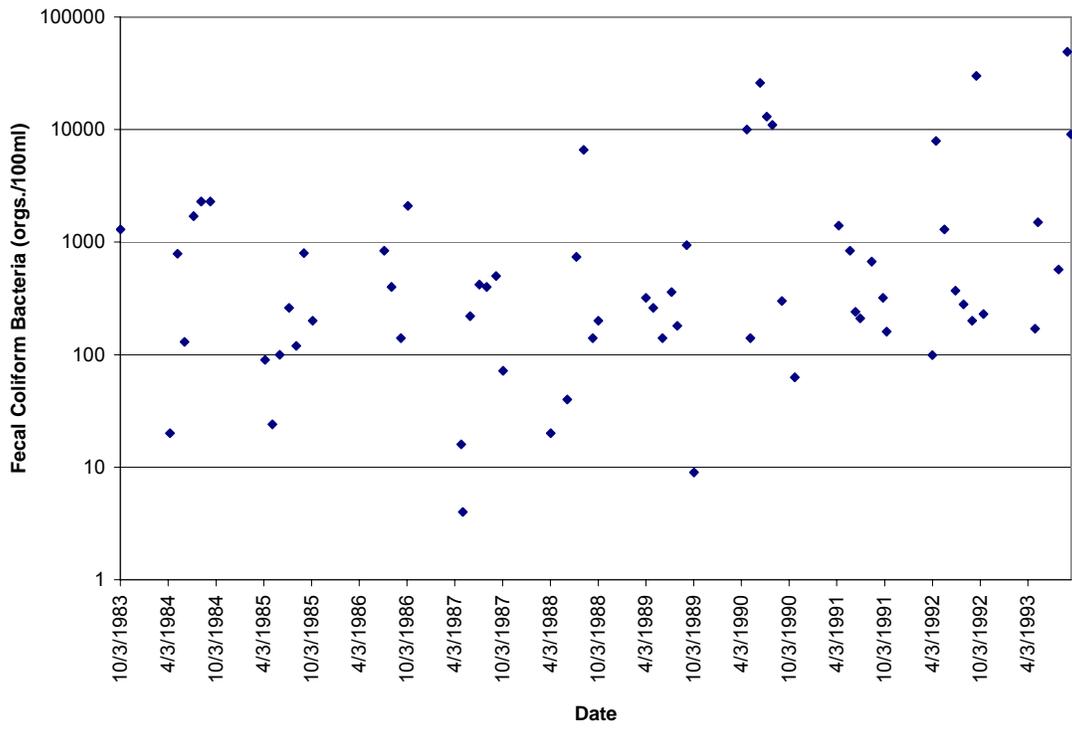

2.0 BASIN CHARACTERISTICS:

The Lower Mississippi River Basin, which includes the Cedar River Basin for planning purposes, is located in southeastern Minnesota. It includes all or part of 17 counties and has 12 major watersheds covering about 7,266 square miles (4,650,100 acres). Land use is diverse. On the western side, lands are primarily cultivated, while the eastern landscapes are dominated by steep forested hill slopes. About two-thirds of the land in the basin is under cultivation, while about 13 percent is forested. Roughly 17 percent of the land use is open or pasture lands. Major agricultural crops include corn, soybeans, and hay. Animal production includes dairy and beef cattle, hogs, sheep and lambs. The total human population of the basin is estimated to be 638,020. Of this total, 77 percent is urban and 23 percent is rural. Major population centers include the southern metropolitan area of Dakota County, in addition to Austin, Albert Lea, Faribault, Owatonna, Rochester, Red Wing, and Winona. These and other urban areas are experiencing rapid population growth and commercial development. Substantial variation among impaired reach watersheds is apparent (Table 2.1). The percent of cultivated land, for example, ranges from less than 50 percent to over 90 percent. Urban and rural developed land comprises between 10 percent and over 30 percent of the South Zumbro and Vermillion watersheds, respectively, but only a few percent of the rest of the watersheds.

Limestone bluffs, springs, caves, and numerous trout streams abound in the eastern basin, where steep topography and erosive soils increase the potential for pollutant runoff and sedimentation of streams. Sinkholes and disappearing streams highlight the close connection between surface water and ground water in this part of the basin. The presence of fractured limestone bedrock lying close below the land surface, which is often referred to as karst topography,¹ presents a widespread risk of ground water contamination in the eastern basin. In the southwestern basin, Mississippi tributaries emerge as small streams out of a prairie landscape once rich in wetlands, but now extensively drained to support a productive agriculture. Further to the north, in the western Cannon River Watershed, remnants of the Big Woods hardwood forest intermingle with mixed crop and livestock farming in a rolling terrain interspersed with lakes and wetlands.

¹ Karst is a geologic term used to describe a landscape created over soluble rock with efficient underground drainage. The underlying rock dissolves over time as surface water percolates through the soil and carbon dioxide from the air and from biological activity in the soil combine with the water. The water and carbon dioxide chemically form a weak carbonic acid that reacts with calcite and dolomite, causing the rock to dissolve slowly to produce joints and cracks.

Table 2.1 Land Use/Land Cover for Lower Mississippi Basin Impaired Reach Watersheds

Impaired Reach (indentation indicates subwatershed) Cult. = Cultivated	Drainage Area (mi ²)	Land Use/Land Cover Percentage					
		Cult.	Grass	Forest	Water/ Wetland	Residential, Urban, Industrial	Other
Cannon River; Pine Cr to Belle Cr	1,386	70	10	12	4	4	
(Prairie Creek; Headwaters to Cannon R (Lk Byllesby))	80	76	10	11	<1	3	
(Unnamed Creek; Headwaters to Prairie Cr)	17	84	11	3	<1	2	
(Unnamed Tributary to Prairie Creek; Unnamed Cr to Unnamed Cr)	13	84	11	3	<1	2	
(Chub Creek; Headwaters to Cannon R)	64	48	31	15	2	4	
Cannon River; Northfield Dam to Lk Byllesby inlet	957	72	10	8	5	5	
Straight River; Rush Cr to Cannon R	461	80	7	6	2	5	
(Rush Creek; Headwaters to Straight R)	22	89	3	6	<1	2	
(Crane Creek; Headwaters (Watkins Lk) to Straight R)	106	81	7	4	4	4	
Straight River; Maple Cr to Crane Cr	252	82	7	5	1	5	
(Maple Creek; Headwaters to Straight R)	38	77	11	5	<1	7	
Straight River; Turtle Cr to Owatonna Dam	204	83	7	5	1	4	
(Turtle Creek; Headwaters to Straight R)	44	82	9	6	1	2	
Straight River; CD #25 to Turtle Cr	135	87	6	4	1	2	
Root River; Thompson Cr to Mississippi R	1,660	60	15	22	<1	3	
(Robinson Creek; Headwaters to N Br Root R)	17	92	5	2	<1	2	
(Money Creek; End of trout stream portion to Root R)	77	36	18	44	<1	2	
Root River, South Branch; Canfield Cr to Willow Cr	143	76	9	13	<1	2	
Root River, South Branch; Headwaters to Class 1B,2A,3B	61	84	8	6	<1	2	
Whitewater River, Middle Fork; trout stream portion	54	69	18	10	<1	2	
Whitewater River, South Fork; trout stream portion above N Fk Whitewater R	93	64	16	15	<1	5	
(Whitewater River, South Fork; Headwaters to trout stream portion)	55	67	18	8	<1	7	
Whitewater River, North Fk; Unnamed Cr to Mid Fk Whitewater R	104	70	17	9	<1	3	
(Logan Branch; End trout stream portion to North Fk Whitewater R)	17	68	23	7	<1	2	
(Whitewater River, North Fork; Unnamed Cr to Unnamed Cr (below Class 7))	20	76	12	10	<1	2	
Garvin Brook; Class 1B,2A,3B portion	49	46	14	37	<1	3	
Stockton Valley Creek; Trout stream portion to Garvin Br	20	48	15	34	<1	2	

Impaired Reach	Drainage Area (mi ²)	Land Use/Land Cover Percentage					
		Cult.	Grass	Forest	Water/Wetland	Residential, Urban, Industrial	Other
Zumbro River; West Indian Creek to Mississippi River	1,488	67	12	11	<1	5	4
Zumbro River; Cold Cr to West Indian Cr	1,401	67	13	9	<1	6	5
Zumbro River, South Fk; Cascade Cr to Zumbro Lk	349	57	20	8	<1	13	2
Zumbro River, South Fork; Silver Lk Dam to Cascade Cr	260	62	20	7	<1	10	
Zumbro River, South Fork; Bear Cr to Oakwood Dam	239	62	20	8	<1	9	
Zumbro River, South Fork; Salem Cr to Bear Cr	157	68	18	7	<1	6	
Salem Creek; Lower 15 miles (Class 2C portion) to South Fk Zumbro R	62	80	12	5	<1	3	
Cedar River; Rose Cr to Woodbury Cr	544	87	5	4	1	4	
Cedar River; Roberts Cr to Upper Austin Dam	185	89	4	4	<1	3	
Shell Rock River; Albert Lea Lk to Goose Cr	195	76	9	5	4	5	
Vermillion River; S Br Vermillion R to the Hastings Dam	273	52	9	8	4	26	
Vermillion River; Below trout stream portion to South Br Vermillion R	142	43	9	7	9	32	

3.0 DESCRIPTION OF APPLICABLE WATER QUALITY STANDARDS AND ASSESSMENT PROCEDURES

All waters of Minnesota are assigned classes, based on their suitability for the following beneficial uses:

1. Domestic consumption
2. Aquatic life and recreation
3. Industrial consumption
4. Agriculture and wildlife
5. Aesthetic enjoyment and navigation
6. Other uses
7. Limited resource value

All surface waters of the state that are not specifically listed in Chapter 7050 and are not wetlands, which includes most lakes and streams in Minnesota, are classified as Class 2B, 3B, 4A, 4B, 5 and 6 waters. (Minn. R. ch. 7050.0430).

According to Minn. R. ch. 7050.0407, the designated beneficial use for the different use classes is as follows:

Class 1B: For domestic consumption following approved disinfection, such as simple chlorination or its equivalent.

Class 2A: Aquatic life support refers to cold water sport or commercial fish and associated aquatic life, and their habitats. Recreation support refers to aquatic recreation of all kinds, including bathing, for which the waters may be usable. Class 2A also is protected as a source of drinking water.

Class 2B: Aquatic life support refers to cool or warm water sport and commercial fish and associated aquatic life. Recreation support refers to aquatic recreation of all kinds, including bathing.

Class 2C: Aquatic life support and recreation includes boating and other forms of recreation for which the water may be suitable (i.e., swimming). Class 2C waters may also support indigenous aquatic life, but not necessarily sport or commercial fish.

Class 3B: General industrial purposes, except for food processing, with only a moderate degree of treatment. Similar to Class 1D waters of the state used for domestic consumption.

Relative to the fecal coliform standard, all of the waters covered in this report are assigned either Class 2A, 2B, or 2C.

3.1 Applicable Minnesota Water Quality Standards

Minn. R. ch. 7050.0222 subp. 4 and 5, fecal coliform water quality standard for class 2B and 2C waters states that fecal coliforms shall not exceed 200 organisms per 100 milliliters

as a geometric mean² of not less than five samples in any calendar month, nor shall more than ten percent of all samples taken during any calendar month individually exceed 2,000 organisms per 100 milliliters. The standard applies only between April 1 and October 31.

Minn. R. ch. 7050.0222, subp. 2, for Class 2A waters, states that fecal coliforms shall not exceed 200 organisms per 100 milliliters as a geometric mean of not less than five samples in any calendar month, nor shall more than ten percent of all samples taken during any calendar month individually exceed 400 organisms per 100 milliliters. The standard applies only between April 1 and October 31.

Minn. R. ch 7050.0221 subp. 2, describes water quality standards for Class 1B waters. Such waters shall be such that with approved disinfection, such as simple chlorination or its equivalent, the treated water will meet both the primary (maximum contaminant levels) and secondary drinking water standards issued by the United States Environmental Protection Agency (US EPA) as contained in Code of Federal Regulations, title 40, part 141, subparts B and G, and part 143, (1992); except that the bacteriological standards shall not apply.

This TMDL study focuses on 200 organisms/100 ml monthly geometric mean as an environmental endpoint for impaired reaches. Establishing TMDLs to meet the geometric mean of 200 organisms/100mL rather than the no exceedance of either 400 or 2000 (depending on use classification) organisms per 100 mL in more than 10% of single samples is consistent with EPA's recent promulgation of water quality criteria for coastal recreational waters. The preamble of the coastal recreational water rule states: "*the geometric mean is the more relevant value for ensuring that appropriate actions are taken to protect and improve water quality because it is a more reliable measure, being less subject to random variation*" (EPA, 2004). The same source-reduction measures that are required to attain compliance with the "chronic" standard also will lead to attainment of compliance with the "acute" standard of 2000 or 400 organisms/100ml cited above. The TMDL requires compliance with both parts of the standard.

3.2 Impairment Assessment

Impairment assessment is based on the procedures found at:

<http://www.pca.state.mn.us/water/tmdl/index.html#support>

For support of swimming and recreation, the fecal coliform methodology (303(d) listing) is as follows: Data are aggregated over a ten-year period by month and by reach. If the geometric mean of at least five samples for each appropriate month (all years combined) exceeded 200 organisms per 100 ml, that reach was placed on the 1998 303(d) list. In addition, if at least 10 percent of the entire data set for a reach during the ten-year period exceeded 2000 (or 400) organisms per 100 ml,

² The term **geometric mean** is used throughout this report to describe fecal coliform data. This statistical function is appropriate for summarizing the central tendency of environmental data that is not normally distributed (Helsel and Hirsch, 1991), which is the case for the fecal coliform data.

then that reach was also placed on the list. The methodology focuses on monthly analysis of the 200 organisms/100 ml standard and brings in the aspect that stream reaches showing a minimum threshold number of high individual values have impaired use and are included on the list.

Tables 1.1 provides summary information on the data used to determine the impairment status of the 39 stream/river reaches included in this report.

3.3: MPCA Non-degradation Policy

Non-degradation is an important component of water quality standards in Minnesota. MPCA policy distinguishes non-degradation for all waters from non-degradation for Outstanding Resource Value Waters (ORVW), as follows:

Minn. R. ch. 7050.0185, subp. 1, Non-degradation for All Waters. The potential capacity of the water to assimilate additional wastes and the beneficial uses inherent in water resources are valuable public resources. It is the policy of the state of Minnesota to protect all waters from significant degradation from point and nonpoint sources and wetland alterations, and to maintain existing water uses, aquatic and wetland habitats, and the level of water quality necessary to protect these uses.

Minn. R. ch. 7050.0180, subp. 1-2. The agency recognizes that the maintenance of existing high quality in some waters of outstanding resource value to the state is essential to their function as exceptional recreational, cultural aesthetic, or scientific resources. To preserve the value of these special waters, the agency will prohibit or stringently control new or expanded discharges from either point or nonpoint sources to outstanding resource value waters. In the Lower Mississippi River Basin, the following water body is designated ORVW: Cannon River from the northern city limits of Faribault to its confluence with the Mississippi River. Both of the Cannon River impaired reaches included in this report fall under the ORVW designation.

4.0 DESCRIPTION OF FECAL COLIFORM BACTERIA AND ITS SOURCES

Certain types of bacteria pose a potential health risk to those who come into contact with surface water. These bacteria come from a variety of sources, including agricultural runoff, inadequately treated domestic sewage, and even wildlife. Some of these bacteria may cause disease. Other potential pathogens (disease-causing agents) from these sources include viruses, protozoa, and worms. Perhaps of greatest concern are bacteria from human feces.

The limitations of available monitoring tools make it difficult to determine whether bacterial contamination in a water body is from human or animal sources. It is, however, possible to determine whether the bacteria originated in the intestinal tract of a mammal. These kinds of bacteria are called fecal coliforms. If fecal coliform bacteria levels exceed state water quality standards, it's an indication that fecal matter is entering the stream in quantities that pose a potential threat to public health.

There are many types of fecal coliform bacteria, and not all of them cause disease in humans, but where there are coliform bacteria there may be pathogens of concern. Thus, widespread violation of the fecal coliform standard in the Lower Mississippi River Basin indicates serious pollution and a possible health *concern*, but it doesn't necessarily mean there is an immediate health *threat* in any particular area.

Bacterial contamination of surface and ground water by antibiotic-resistant microorganisms has been expressed as a public concern in southeastern Minnesota; however, this issue has not been widely studied and is not addressed in this report. Further work is needed in this area.

The relationship between land use and fecal coliform concentrations found in streams is complex, involving both pollutant transport and rate of survival in different types of aquatic environments. Intensive sampling at several of the sites listed above in southeastern Minnesota shows a strongly positive correlation between stream flow, precipitation, and fecal coliform bacteria concentrations. In the Vermillion River watershed, storm-event samples often showed concentrations in the thousands of organisms per 100 milliliters, far above non-storm-event samples. A study of the Straight River watershed divided sources into continuous (failing individual sewage treatment systems, unsewered communities, industrial and institutional sources, wastewater treatment facilities) and weather-driven (feedlot runoff, manured fields, urban stormwater categories). The study hypothesized that when precipitation and stream flows are high, the influence of continuous sources is overshadowed by weather-driven sources, which generate extremely high fecal coliform concentrations. However, during drought, low-flow conditions continuous sources can generate high concentrations of fecal coliform, the study indicated. Besides precipitation and flow, factors such as temperature, livestock management practices, wildlife activity, fecal deposit age, and channel and bank storage also affect bacterial concentrations in runoff (Baxter-Potter and Gilliland, 1988).

Several studies have found a strong correlation between livestock grazing and fecal coliform levels in streams running through pastures. Several samples taken in the Grindstone River in the St. Croix River Basin, downstream of cattle observed to be in the stream, were found to contain a geometric mean of 11,000 organisms/100 ml, with individual samples ranging as high as 110,000/100ml. However, carefully managed grazing can be beneficial to stream water quality. A study of southeastern Minnesota streams by Sovell, et. al., found that fecal coliform, as well as turbidity, were consistently higher at continuously grazed sites than at rotationally grazed sites where cattle exposure to the stream corridor was greatly reduced. This study and several others indicate that sediment-embeddedness, turbidity, and fecal coliform concentrations are positively related. Fine sediment particles in the streambed can serve as a substrate harboring fecal coliform bacteria. "Extended survival of fecal bacteria in sediment can obscure the source and extent of fecal contamination in agricultural settings," (Howell et. al., 1996).

Hydrogeologic features in southeastern Minnesota may favor the survival of fecal coliform bacteria. Cold ground water, shaded streams, and sinkholes may protect fecal coliform from light, heat, drying, and predation (MPCA 1999). Sampling in the South Branch of the Root River watershed showed concentrations of up to 2,000 organisms/100 ml coming from springs, pointing to a strong connection between surface water and ground water (Fillmore County 1999 & 2000). The presence of fecal coliform bacteria has been detected in private well water in southeastern Minnesota. However, many such detections have been traced to problems of well construction, wellhead management, or flooding, not from widespread contamination of the deeper aquifers used for drinking water. One study from Kentucky showed that rainfall on well-structured soil with a sod surface could generate fecal coliform contamination of the shallow ground water through preferential flow (McMurry *et. al.*, 1998).

Finally, fecal coliform survival appears to be shortened through exposure to sunlight. This is purported to be the reason why, at several sampling sites downstream of reservoirs, fecal coliform concentrations were markedly lower than at monitoring sites upstream of the reservoirs. This has been demonstrated at Lake Byllesby on the Cannon River and the Silver Creek Reservoir on the South Branch of the Zumbro River in Rochester.

Despite the complexity of the relationship between sources and in-stream concentrations of fecal coliform, the following can be considered major source categories:

Wastewater Treatment Facilities

The great majority of the urban population in the Lower Mississippi River basin is served by centralized sewage treatment, which includes disinfection at the final treatment stage. All permitted wastewater treatment facilities are required to monitor their effluent

to ensure that concentrations of specific pollutants remain within levels specified in the discharge permit. Effluent limits require that fecal coliform concentrations remain below 200 organisms per 100 milliliters from April 1 through October 31. This is accomplished through disinfection of the wastewater at the final treatment stage, through chlorination or equivalent processes. The MPCA regularly reviews the Discharge Monitoring Reports from wastewater treatment facilities to determine whether permit violations have occurred. The previous TMDL study found relatively few violations. This was confirmed in a review of information for 2004 and 2005.

Emergency bypasses at wastewater treatment facilities are an occasional source of bacteria and other pollutants. These bypasses are also referred to as sanitary sewer overflows (SSO's). Wastewater treatment plants and sanitary sewer systems are designed to handle at least 100 gallons of water per person per day, as well as the additional flow generated by commercial and industrial establishments. If the amount of water entering a system exceeds the design capacity of the system, some of the untreated wastewater is discharged to the environment. This event is called a bypass because the wastewater has bypassed part or all of the treatment process. Efforts to minimize or eliminate wastewater bypasses are managed through the NPDES program.

As part of the previous TMDL, wastewater treatment facility reports for 2001 were examined to identify cities where one or more bypasses had occurred. In calendar year 2001, 24 cities in the Lower Mississippi River Basin reported one or more bypasses. Most of these cities (21) experienced bypasses one or two times. These were judged to be isolated occurrences triggered by extreme rainfall events, particularly flooding that occurred early in May and June. As such, bypasses are not expected to reoccur at these facilities unless caused by extreme weather and flooding.

For three of the cities, bypasses occurred three or more times, signifying structural problems that needs to be corrected. The most common structural problem contributing to wastewater bypasses is inflow and infiltration into the wastewater collection system. This problem can be compounded by limited hydraulic capacity at the wastewater treatment facility. Based on these criteria, three cities were considered to have a chronic bypass problem: Claremont, Kasson, and West Concord. Each of these cities has upgraded their wastewater treatment facilities since 2001 and no longer have chronic bypass problems. A review of information for 2004 and 2005 revealed no facilities with chronic bypass issues.

No facilities in the basin are known to currently have combined storm and sanitary sewer systems, which may lead to combined sewer overflow (CSO) discharges to surface waters. The City of Red Wing on the Mississippi River did correct such interconnections several years ago.

Livestock Facilities with NPDES Permits

The MPCA currently uses the federal definition of a Concentrated Animal Feeding Operations (CAFO) in its regulation of animal feedlots. In Minnesota, the following types of livestock facilities are issued, and must operate under, a National Pollutant Discharge Elimination System (NPDES) permit: a) all federally defined (CAFOs), some of which are under 1000 animal units in size; and b) all CAFOs and non-CAFOs which have 1000 or more animal units.

There are presently 137 livestock facilities or feedlots operating under NPDES permits in the Lower Mississippi River Basin of Minnesota; 103 within the impaired reach watersheds covered in this report. These feedlots must be designed to totally contain runoff, and manure management planning requirements are more stringent than for smaller feedlots. In accordance with the State of Minnesota's agreement with EPA, CAFO's with state-issued General NPDES permits must be inspected twice during every five year permitting cycle and CAFO's with state issued Individual NPDES permits are inspected annually.

The vast majority of livestock facilities in the Lower Mississippi River Basin in Minnesota are not CAFO's subject to NPDES permit requirements. Nevertheless, they are subject to state feedlot rules which include provisions for registration, inspection, permitting, and upgrading. Much of this work is accomplished through delegation of authority from the state to county government.

Individual Sewage Treatment Systems

Of the rural population of the Lower Mississippi River basin, an estimated 65,314 – or 44 percent – have inadequate treatment of their household wastewater. This includes individual residences and unsewered communities, both incorporated and unincorporated. Nonconforming septic systems are considered to be an important source of fecal coliform bacteria, particularly during periods of low precipitation and runoff when this continuous source may dominate fecal coliform loads. Unsewered or undersewered communities include older individual systems that are generally failing, and/or collection systems that discharge directly to surface water. This may result in locally high concentrations of wastewater contaminants in surface water, including fecal coliform bacteria, in locations close to population centers where risk of exposure is relatively high.

The court decision leading to this revised TMDL included the following language related to septic systems that discharge directly to surface waters:

“MCEA describes a straight pipe septic system as a system of disposing untreated sewage directly via a pipe to rivers, lakes, drain tiles, or ditches. Such systems are illegal pursuant to Minnesota Statute. Minn. Stat. §§ 115.55 and 115.56.”

The MPCA concurs that these are illegal and un-permitted systems, and would expand the definition slightly to include partially treated, as well as untreated, sewage. The majority of these systems likely have some form of rudimentary settling which may provide partial, but inadequate, treatment. The Minnesota Rules Chapter 7080 definition of septic systems posing an imminent threat to public health or safety includes “surface or surface water discharges and sewage backup into a dwelling or other establishment.” Straight pipe septic systems clearly meet this definition.

An MPCA evaluation for the Minnesota River Basin suggests that improper Individual Sewage Treatment Systems (ISTS) may be responsible for approximately 74 fecal coliform bacteria organisms per 100 milliliter sample within larger rivers.³ However, transport and survival of fecal coliform bacteria are not well understood, particularly as they are affected by the interaction of surface and ground water flows in the karst geology found throughout the Lower Mississippi Basin.

Livestock Manure

Runoff from livestock feedlots, pastures, and land application areas has the potential to be a significant source of fecal coliform bacteria and other pollutants. There is considerable spatial variation in the type and density of livestock across the basin.

Swine accounts for the major share of livestock animal units in several counties in the west and south-central part of the basin: Freeborn, Mower, Steele, and Waseca Counties. Swine facilities tend to confine livestock under a roof, with a pit for liquid manure beneath a slated floor. Thus, feedlot runoff tends not to be a common occurrence with most facilities, but land application of manure can be a major source of nonpoint pollution runoff. Liquid swine manure is commonly incorporated into the soil during, or shortly after, land application. This greatly reduces the pollution for bacteria runoff

Dairy and beef cattle predominate livestock numbers in the eastern and, especially, the southeastern counties, including Wabasha, Winona, Fillmore, Goodhue, Houston, and Olmsted Counties. The majority of cattle operations are relatively small, with open feedlots, presenting the potential for polluted runoff much of the year. Considerable grazing of cattle still occurs in the eastern basin. Where over-grazing occurs, serious erosion and manure runoff can result. This includes grazing of woodland, which can result in severe erosion. However, properly managed pasture can increase infiltration of precipitation into the soil profile, reducing runoff and improving water quality. In Dakota, Rice, and Dodge Counties, livestock are about evenly divided between swine and cattle. For a number of reasons, cattle manure is generally less likely to be incorporated into the soil than swine manure. Manure that is not incorporated has a higher potential for runoff.

³ David Morrison, “Contributions from Septic Systems and Undersewered Communities,” presented at Bacteria in the Minnesota River, Mankato, Minnesota, Feb 16, 1999

Rice, Steele, Dodge, and Olmsted counties have a significant amount of poultry production, accounting for around 10% of the total animal units in these counties. While there is little runoff potential from the enclosed poultry facilities themselves, open stockpiling of poultry manure is a common practice. These stockpiles, as well as land application areas, are potential sources of bacteria runoff.

Urban and Rural Stormwater

Untreated stormwater from cities, small towns, and rural residential or commercial areas can be a source for many pollutants including fecal coliform bacteria and associated pathogens. Fecal coliform concentrations in urban runoff can be as great or greater than those found in cropland runoff, and feedlot runoff (USEPA 2001). Sources of fecal coliform in urban and residential stormwater include pet and wildlife waste that can be directly conveyed to streams and rivers via impervious surfaces and storm sewer systems. Newer urban development often includes stormwater treatment in the form of such practices as sedimentation basins, infiltration areas, and vegetated filter strips. Several communities within the watersheds of the impaired reaches included in this report are required to obtain Municipal Separate Storm Sewer System (MS4) permits. These permits require a range of actions that will ultimately reduce the impact of stormwater from these communities on downstream water bodies. Smaller communities or even rural residences not covered under MS4 permits may still need to take action to reduce stormwater, and associated bacteria, runoff.

5.0 LOAD ALLOCATIONS (LA), WASTELOAD ALLOCATIONS (WLA), and MARGINS OF SAFETY (MOS)

5.1 Approach to Allocations Needed to Satisfy the TMDLs

The TMDLs developed for the 39 reaches in this report consist of three main components; WLA, LA, and MOS as defined in section 1.0. The WLA includes four sub-categories: permitted wastewater treatment facilities; communities subject to Stormwater MS4 NPDES permit requirements; livestock facilities requiring NPDES permits, and “straight pipe” septic systems. The LA, reported as a single category includes manure runoff from farm fields, pastures, and smaller non-NPDES-permitted feedlots, runoff from smaller non-MS4 communities, and fecal coliform contributions from wildlife. The LA includes land-applied manure from livestock facilities requiring NPDES permits, provided the manure is applied in accordance with the permit. The third component, MOS, is the part of the allocation that accounts for uncertainty that the allocations will result in attainment of water quality standards.

The three TMDL components (WLA, LA, and MOS) were calculated as total monthly loads of fecal coliform organisms. Two different approaches were evaluated for expressing the monthly fecal coliform loads: 1) the number of fecal coliform organisms per month for each month from April to October; and 2) the number of fecal coliform organisms per month for a each of series of five flow zones ranging from low flow to high flow. Respectively, these are referred to as the monthly approach and the duration curve approach. Both approaches utilize long-term flow records from 14 current and historical U.S. Geological Survey gage stations located throughout the Lower Mississippi basin (Appendix A). Flow values from the most appropriate USGS site were normalized for the contributing drainage areas of each of the 39 impaired reaches.

One advantage of the monthly approach is its direct correspondence to the monthly period of the fecal coliform standard as it is written in Minnesota water quality rules. A second advantage may be the potential for easier communication to the public. However, this approach required selecting specific flows to represent each month. While monthly “average” flows can be calculated from any given period of record, they do not represent the full range of monthly flows that may be observed over many years. Allocations based on average monthly flows will ensure that water quality standards are achieved at or above the average flow, but not at lower flows. If a minimum monthly flow is chosen, allocations set to achieve standards for this volume of water will be overprotective at all higher flows, raising question about attainability of the allocations, particularly at higher flows where fecal coliform loads are dominated by surface runoff.

To overcome the apparent arbitrariness involved in making decisions on monthly flow values, and in concurrence with USEPA recommendations (Appendix D), the duration curve approach was chosen. Under this approach, allocations for each listed stream reach are developed for the full range of flows experienced during the April 1 – Oct 31 period of the fecal coliform standard. By adjusting the wasteload allocation, load

allocation and margin of safety to a range of five discrete flow intervals at each reach, a closer correspondence is obtained between the (flow-specific) loading capacity and the TMDL components (WLA + LA + MOS), at the range of flow conditions experienced historically at each site. This approach also makes it possible to relate fecal coliform sources to allocations more specifically. For example, continuous discharges such as failing ISTS will be more prominent at lower flows, and manure runoff will be more prominent at higher flows. This kind of distinction is easier to make with the duration curve approach than with a monthly approach.

A more complete presentation of the two different approaches for expressing fecal coliform load is provided in Appendix A. In particular, Figure A-4 provides an example (for the Vermillion River) of the relationship between monthly flows and flow zones, and how the complete range of monthly flows is encompassed in the five flow zones.

The fecal coliform loading expression utilized for the TMDLs contained in this report is *organisms per month*, which are shown for each of a range of five flow intervals at each impaired reach. For a given impaired reach, flow-specific loading capacities were obtained by multiplying the median flow of each of five flow zones by the geometric mean water quality criterion of 200 organisms per 100 ml. This generally produces loading capacities in the trillions of organisms per month (tera- or T-org/month).

For each impaired reach and flow condition, the total loading capacity (TMDL) was divided into its component wasteload allocation, load allocation, and margin of safety (MOS). The process was as follows:

WASTELOAD ALLOCATION

- Wastewater treatment facility (WWTF) allocations were calculated by multiplying wet-weather design flows for all facilities in an impaired reach watershed by the permitted discharge limit (200 organisms per 100ml) that applies to all WWTFs. As long as WWTFs discharge at or below this permit limit, they will not cause violations of the fecal coliform water quality standard regardless of their fecal coliform load.
- A number of smaller NPDES-permitted WWTF's are stabilization ponds systems. Unlike the larger (and some smaller) mechanical treatment systems which have continuous discharges, pond systems typically discharge over a 1-2 week period in the spring and in the fall. Because the discharge volumes from these pond systems are small, and to provide an extra margin of safety in the event they needed to discharge outside of the spring or fall window, the WWTF wasteload allocation assumed that these facilities could discharge for an entire month under any flow conditions.
- Straight-pipe septic systems are illegal and un-permitted, and as such are assigned a zero wasteload allocation.
- Since wet-weather design flows represent a "maximum" flow for a facility, the WWTF allocations are conservative in that they are substantially greater than what is actually required.

- For two of the impaired reaches (Vermillion and Shell Rock Rivers) WWTF design flows exceed minimum stream flow for the low and dry flow zones. For the lower reach of the Vermillion, this also occurred for the low flow zone when MOS was considered. Of course, actual WWTF flow can never exceed stream flow as it is a component of stream flow. To account for these three unique situations only, the wasteload and load allocations are expressed as an equation rather than an absolute number. That equation is simply:

$$\text{Allocation} = (\text{flow contribution from a given source}) \times (200 \text{ orgs./100ml.})$$

In essence, this amounts to assigning a concentration-based limit to MS4 communities and nonpoint source load allocation sources. While this might be seen as quite stringent, these sources tend not to be significant contributors under dry and low flow conditions. The contribution of fecal coliform from straight-pipe septic systems could be substantial under these conditions; however these systems are still assigned a zero allocation, as are livestock facilities with NPDES permits.

- Livestock facilities that have been issued NPDES permits are assigned a zero wasteload allocation. This is consistent with the conditions of the permits, which allow no pollutant discharge from the livestock housing facilities and associated site. Discharge of fecal coliform from fields where manure has been land applied may occur at times. Such discharges are covered under the load allocation portion of the TMDLs, provided the manure is applied in accordance with the permit.
- The WWTF allocation and MOS were subtracted from the total loading capacity. The remaining capacity was divided between municipal separate storm sewer system (MS4) permits (wasteload allocation) and all nonpoint sources (load allocation) based on the percentage of land in an impaired reach watershed covered by MS4 permits. For example, if 10% of an impaired reach watershed is covered by one or more MS4 permits, 10% of the remaining capacity is allocated to those permits. In addition to being a practical way to allocate between MS4 permits and all other nonpoint sources, it is also equitable from the standpoint of rural and urban fecal coliform sources being held to the same “standard.”

MARGIN OF SAFETY

- Margins of safety (MOS) were calculated based on the difference between the median flow and minimum flow in each zone as described in appendix A. For the low flow zone, this reflects the lowest monthly April-October flow observed over the past 30 years (or period of record if less than 30 years) at the specific USGS site used to develop allocations for each impaired reach.
- The purpose of the MOS is to account for uncertainty that the allocations will result in attainment of water quality standards. Because the allocations are a direct function of monthly flow, accounting for potential flow variability is the appropriate way to address the MOS. This is done within each of 5 flow zones.

As stated above, the absolute minimum monthly flows over long periods of record at the USGS gage sites define the MOS for the low flow zone.

LOAD ALLOCATION

- Once the WLA and MOS were determined for a given reach and flow zone, the remaining loading capacity was considered load allocation. The load allocation includes nonpoint pollution sources that are not subject to NPDES permit requirements, as well as “natural background” sources such as wildlife. The nonpoint pollution sources are largely related to livestock production, inadequate human wastewater treatment, and municipal stormwater systems. Portions of the latter two sources, straight-pipe septic systems and communities covered by MS4 NPDES permits, are included in the wasteload allocation.

5.2 TMDL Allocations for Individual Impaired Reaches

5.21 Cannon River, Pine Creek to Belle Creek (AUID: 07040002-502)

The 11-mile reach of the Cannon River from Pine Creek to Belle Creek was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 1,386 square miles. This represents over 90% of the entire Cannon River watershed. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (70%), but exhibits a relatively high percentage water and wetlands (4%) which are located primarily in the western portion of the Cannon River watershed upstream of the confluence with the Straight River. The watershed includes 14 communities and a highway rest area served by permitted wastewater treatment facilities (Table 5.21A); and 32 livestock facilities that have been issued NPDES permits (Table 5.21B). Approximately 24,000 acres, or 3% of the watershed, will require coverage under MS4 permits. This includes the cities of Faribault, Owatonna, Northfield, and Waseca (Table 5.21C). An additional 1% of the watershed area contains smaller towns and rural residences.

Table 5.21D describes the monthly fecal coliform loading capacities for this reach of the Cannon River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities for five flow zones were developed using flow data from the USGS gage site on the Cannon River at Welch as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations. It is possible that Lake Byllesby, as well as other lakes and wetlands in the upper Cannon watershed, function to reduce downstream bacteria loading. As such, some focus on sources downstream of Lake Byllesby may lead to greater water quality improvements on the impaired reach.

Table 5.21A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Cannon Falls WWTP	MN0022993	0.92	0.21
Dennison WWTP	MN0022195	0.029	0.01
Ellendale WWTP	MN0041564	0.1003	0.02
Elysian WWTP	MN0041114	0.0186	0.004
Faribault WWTP	MN0030121	7	1.59
Geneva WWTP	MN0021008	0.069	0.02
Kilkenny WWTP	MNG580084	0.0228	0.01
Lonsdale WWTP	MN0031241	0.2418	0.05
MNDOT Straight River Rest Area	MN0049514	0.0093	0.002

Medford WWTP	MN0024112	0.09	0.02
Morristown WWTP	MN0025895	0.21	0.05
Nerstrand WWTP	MN0065668	0.042	0.01
Northfield WWTP	MN0024368	5.2	1.18
Owatonna WWTP	MN0051284	5	1.14
Waterville WWTP	MN0025208	0.271	0.06
Totals		19.22	4.37

Table 5.21B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Matthew Hanson Farm	131-104880	3,300 Swine - 55 lbs. or More
Fern Peterson Farm	049-73087	100,000 Turkeys
Hovel Farms - Sec 33	049-82020	2,600 Swine - 55 lbs. or More
Randall S Rauk Farm	049-50008	3,300 Swine - 55 lbs. or More
Scott Gustafson Farm	049-50005	4,440 Swine - 55 lbs. or More
Tim and Marvin D Donkers Farm	049-72775	2,800 Swine - 55 lbs. or More
Gibbs Farms Inc	079-80335	4,000 Swine - 55 lbs. or More
Koppelman Farm's Inc	079-50006	3,300 Swine - 55 lbs. or More
MN Dak Farms	079-66313	2,500 Swine - 55 lbs. or More
Eastgate Farms - Sec 32 - Main	131-93622	99,000 Turkeys
Jennie-O Turkey Store - Lakeview	131-93683	211,800 Chickens - broilers,
Jennie-O Turkey Store - Valleyview	131-50007	78,000 Turkeys
Kent Holden Farm	131-93843	4,730 Swine - 55 lbs. or More
Jennie-O Turkey Store - Hillcrest Farm	131-50006	144,000 Turkeys
Ahlman Hog Farm Sec 11	147-50002	4,000 Swine - 55 lbs. or More
Heers Family Farm	147-50006	4,000 Swine - 55 lbs. or More
Jennie-O Turkey Store - Merton Farm	147-50008	144,000 Turkeys
Steven Jaster Farm	147-50005	4,000 Swine - 55 lbs. or More
Charles Zimmerman Farm - Sec 15	131-93142	230,000 Chickens - broilers,
Holden Farms - Fallbro - Sec 17	131-93606	216,000 Chickens - broilers,
Holden Farms Inc - Fallingbrook Facility	131-50005	60,000 Turkeys
P & J Products Co - Site III	131-50004	73,500 Turkeys
Bruce Peterson Farm - Sec 34	131-93620	2,280 Swine – 55 lbs. or More + some beef and dairy
Chad Johnson Farm	047-102279	3,120 Swine - 55 lbs. or More
Brian Waage Farm	147-50003	4,000 Swine - 55 lbs. or More
J&K Farms LLC	147-92330	4,800 Swine - 55 lbs. or More
Jeff Ptacek Farm - Sec 36	147-92217	4,000 Swine - 55 lbs. or More
Shane & Rod Wagner Farm - Sec 15	147-92127	4,400 Swine - 55 lbs. or More
Brian J Kosel Farm - Sec 23	147-92323	2,720 Swine - 55 lbs. or More
Jennie-O Turkey Store - Deerfield Farm	147-50007	144,000 Turkeys
Wingspan LLP	161-50012	7,200 Swine - 55 lbs. or More
Woodville Pork	161-50011	2,400 Swine – 55 lbs. or More 1,800 Swine – under 55 lbs.

Table 5.21C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Faribault	20,818	Designated by rule; > 10,000 population
Owatonna	22,434	Designated by rule; > 10,000 population
Northfield	17,147	Designated by rule; > 10,000 population
Waseca	8,493	Designated by rule; > 10,000 population and within ½ mile of an impaired water (Clear Lake)

Table 5.21D. Monthly Fecal Coliform Loading Capacities and Allocations - Cannon River, Pine Creek to Belle Creek (AUID: 07040002-502)

Drainage Area (square miles):	1,386					
USGS gage used to develop flow zones and loading capacities: Cannon River at Welch						
% MS4 Urban:	3%					
Total WWTF Flow (mgd):	19.2238					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		395.39	143.11	66.89	31.63	14.55
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		4.37	4.37	4.37	4.37	4.37
Communities Subject to MS4 NPDES Requirements		6.86	2.52	1.12	0.39	0.15
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		247.07	90.61	40.16	14.14	5.42
Margin of Safety		137.10	45.62	21.25	12.73	4.61
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		1.1%	3.1%	6.5%	13.8%	30.0%
Communities Subject to MS4 NPDES Requirements		1.7%	1.8%	1.7%	1.2%	1.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		62.5%	63.3%	60.0%	44.7%	37.3%
Margin of Safety		34.7%	31.9%	31.8%	40.2%	31.7%

**5.22 Prairie Creek, Headwaters to Cannon River (Lake Byllesby)
(AUID: 07040002-504)**

The entire 26-mile length of Prairie Creek, a tributary of the Cannon River that flows into Lake Byllesby near Cannon Falls, was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 80 square miles, encompassing land in both Rice and Goodhue counties. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (76%). The watershed includes one community (Dennison) served by a permitted wastewater treatment facility (Table 5.22A); and five livestock facilities that have been issued NPDES permits (Table 5.22B). At the present time, none of the watershed requires coverage under a MS4 permit (Table 5.22C).

Table 5.22D describes the monthly fecal coliform loading capacities for Prairie Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities for five flow zones were developed using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.22A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Dennison WWTP	MN0022195	0.029	0.01

Table 5.22B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Charles Zimmerman Farm - Sec 15	131-93142	230,000 Chickens - broilers,
Holden Farms - Fallbro - Sec 17	131-93606	216,000 Chickens - broilers,
Holden Farms Inc - Fallingbrook Facility	131-50005	60,000 Turkeys
P & J Products Co - Site III	131-50004	73,500 Turkeys
Bruce Peterson Farm - Sec 34	131-93620	2,280 Swine – 55 lbs. or More + some beef and dairy

Table 5.22C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.22D. Monthly Fecal Coliform Loading Capacities and Allocations - Prairie Creek, Headwaters to Cannon River (Lake Byllesby) (AUID: 07040002-504)

Drainage Area (square miles):	80					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0.029	Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		29.65	13.31	6.22	2.36	0.87
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.01	0.01	0.01	0.01	0.01
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		22.10	8.41	4.06	1.11	0.41
Margin of Safety		7.54	4.89	2.15	1.24	0.45
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.0%	0.1%	0.3%	0.8%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		74.5%	63.2%	65.3%	47.2%	47.5%
Margin of Safety		25.4%	36.7%	34.6%	52.5%	51.7%

5.23 Unnamed Creek, Headwaters to Prairie Creek (AUID: 07040002-512)

Prairie Creek, a tributary of the Cannon River that flows into Lake Byllesby near Cannon Falls, was added to the Section 303(d) Clean Water Act impaired waters list in 1994. This 3-mile unnamed tributary to Prairie Creek was added to the list in 2002. The primary source of data that led to this listing was a fecal coliform special study conducted by the MPCA in 1997 and 1998 (Markus, 1999). Figure 1.1 shows two unnamed tributaries to Prairie Creek; this tributary is north (closer to Lake Byllesby) of the other, and straddles the Rice/Goodhue county line.

The drainage area to the downstream end of this impaired reach is 17 square miles. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (84%). The watershed includes one community (Dennison) served by a permitted wastewater treatment facility (Table 5.23A); but no livestock facilities have been issued NPDES permits (Table 5.23B). At the present time, none of the watershed requires coverage under a MS4 permit (Table 5.23C).

Table 5.23D describes the monthly fecal coliform loading capacities for this Unnamed Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.23A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Dennison WWTP	MN0022195	0.029	0.01

Table 5.23B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.23C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.23D. Monthly Fecal Coliform Loading Capacities and Allocations - Unnamed Creek, Headwaters to Prairie Creek (AUID: 07040002-512)

Drainage Area (square miles):	17					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0.029					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		6.53	2.93	1.37	0.52	0.19
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.01	0.01	0.01	0.01	0.01
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		4.86	1.84	0.89	0.24	0.08
Margin of Safety		1.66	1.08	0.47	0.27	0.10
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.1%	0.2%	0.5%	1.3%	3.5%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		74.5%	62.9%	65.2%	46.8%	43.9%
Margin of Safety		25.4%	36.9%	34.3%	51.9%	52.6%

5.24 Unnamed Tributary, Headwaters to Prairie Creek (AUID: 07040002-513)

Prairie Creek, a tributary of the Cannon River that flows into Lake Byllesby near Cannon Falls, was added to the Section 303(d) Clean Water Act impaired waters list in 1994. This 5-mile unnamed tributary to Prairie Creek was added to the list in 2002. The primary source of data that led to this listing was a fecal coliform special study conducted by the MPCA in 1997 and 1998 (Markus, 1999). Figure 1.1 shows two unnamed tributaries to Prairie Creek; this tributary is south (further from Lake Byllesby) of the other, and lies completely in Rice County.

The drainage area to the downstream end of this impaired reach is 13 square miles. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (84%). The watershed contains no communities served by permitted wastewater treatment facilities (Table 5.24A) or livestock facilities that have been issued NPDES permits (Table 5.24B). At the present time, none of the watershed requires coverage under a MS4 permit (Table 5.24C).

Table 5.24D describes the monthly fecal coliform loading capacities for this Unnamed Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.24A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.24B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.24C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.24D. Monthly Fecal Coliform Loading Capacities and Allocations - Unnamed Tributary, Headwaters to Prairie Creek (AUID: 07040002-513)

Drainage Area (square miles):	13					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		4.66	2.09	0.98	0.37	0.14
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		3.47	1.32	0.64	0.18	0.07
Margin of Safety		1.19	0.77	0.34	0.19	0.07
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.0%	0.0%	0.0%	0.0%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		74.5%	63.2%	65.3%	48.6%	50.0%
Margin of Safety		25.5%	36.8%	34.7%	51.4%	50.0%

**5.25 Chub Creek, Headwaters to Cannon River (Lake Byllesby)
(AUID: 07040002-528)**

The entire 20-mile length of Chub Creek, a tributary of the Cannon River with the confluence just at the upstream end of Lake Byllesby, was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was monitoring carried out by Dakota County in 1999 and 2000.

The drainage area to the downstream end of this impaired reach is 64 square miles, all of which falls within Dakota County. Land use in the watershed upstream of the impairment (Table 2.1) about one-half cultivated, but includes a high percentage of grassland (31%) and forest (15%) for this part of the state. The watershed contains no communities served by permitted wastewater treatment facilities (Table 5.25A) and no livestock facilities that have been issued NPDES permits (Table 5.25B). At the present time, none of the watershed requires coverage under a MS4 permit (Table 5.25C).

Table 5.25D describes the monthly fecal coliform loading capacities for Chub Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.25A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.25B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.25C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.25D. Monthly Fecal Coliform Loading Capacities and Allocations - Chub Creek, Headwaters to Cannon River (Lake Byllesby) (AUID: 07040002-528)

Drainage Area (square miles):	64				
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault					
% MS4 Urban:	0%				
Total WWTF Design Flow (mgd):	0				
	Flow Zone				
	High	Moist	Mid	Dry	Low
	values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY	23.79	10.68	4.99	1.90	0.70
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements	0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits	0	0	0	0	0
"Straight Pipe" Septic Systems	0	0	0	0	0
Load Allocation	17.74	6.76	3.27	0.91	0.34
Margin of Safety	6.05	3.92	1.72	0.99	0.36
	values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY	100%	100%	100%	100%	100%
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	0.0%	0.0%	0.0%	0.0%	0.0%
Communities Subject to MS4 NPDES Requirements	0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits	0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems	0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation	74.6%	63.3%	65.5%	47.9%	48.6%
Margin of Safety	25.4%	36.7%	34.5%	52.1%	51.4%

5.26 Cannon River, Northfield Dam to Lake Byllesby Inlet (AUID: 07040002-509)

The 10-mile reach of the Cannon River from the Northfield dam to the inlet of Lake Byllesby was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was monitoring work carried out by the Cannon River Watershed Partnership in 1998, 2001, and 2002

The drainage area to the downstream end of this impaired reach is 957 square miles. This represents about two-thirds of the entire Cannon River watershed. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (72%), but exhibits the highest percentage water and wetlands (5%) among the impaired reach watersheds included in this report. These lakes and wetlands are located primarily in the western portion of the Cannon River watershed upstream of the confluence with the Straight River. The watershed includes 11 communities and a highway rest area served by permitted wastewater treatment facilities (Table 5.26A); and 21 livestock facilities that have been issued NPDES permits (Table 5.26B). Approximately 24,000 acres, or 4% of the watershed, will require coverage under MS4 permits. This includes the cities of Faribault, Owatonna, Northfield, and Waseca (Table 5.26C). An additional 1% of the watershed area contains smaller towns and rural residences.

Table 5.26D describes the monthly fecal coliform loading capacities for this reach of the Cannon River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Cannon River near Welch as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.26A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Ellendale WWTP	MN0041564	0.1003	0.02
Elysian WWTP	MN0041114	0.0186	0.004
Faribault WWTP	MN0030121	7	1.59
Geneva WWTP	MN0021008	0.069	0.02
Kilkenny WWTP	MNG580084	0.0228	0.01
Lonsdale WWTP	MN0031241	0.2418	0.05
MNDOT Straight River Rest Area	MN0049514	0.0093	0.002
Medford WWTP	MN0024112	0.09	0.02
Morristown WWTP	MN0025895	0.21	0.05
Northfield WWTP	MN0024368	5.2	1.18
Owatonna WWTP	MN0051284	5	1.14

Waterville WWTP	MN0025208	0.271	0.06
Totals		18.23	4.14

Table 5.26B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Gibbs Farms Inc	079-80335	4,000 Swine - 55 lbs. or More
Koppelman Farm's Inc	079-50006	3,300 Swine - 55 lbs. or More
MN Dak Farms	079-66313	2,500 Swine - 55 lbs. or More
Eastgate Farms - Sec 32 - Main	131-93622	99,000 Turkeys
Jennie-O Turkey Store - Lakeview	131-93683	211,800 Chickens - broilers,
Jennie-O Turkey Store - Valleyview	131-50007	78,000 Turkeys
Kent Holden Farm	131-93843	4,730 Swine - 55 lbs. or More
Jennie-O Turkey Store - Hillcrest Farm	131-50006	144,000 Turkeys
Ahlman Hog Farm Sec 11	147-50002	4,000 Swine - 55 lbs. or More
Heers Family Farm	147-50006	4,000 Swine - 55 lbs. or More
Jennie-O Turkey Store - Merton Farm	147-50008	144,000 Turkeys
Steven Jaster Farm	147-50005	4,000 Swine - 55 lbs. or More
Chad Johnson Farm	047-102279	3,120 Swine - 55 lbs. or More
Brian Waage Farm	147-50003	4,000 Swine - 55 lbs. or More
J&K Farms LLC	147-92330	4,800 Swine - 55 lbs. or More
Jeff Ptacek Farm - Sec 36	147-92217	4,000 Swine - 55 lbs. or More
Shane & Rod Wagner Farm - Sec 15	147-92127	4,400 Swine - 55 lbs. or More
Brian J Kosel Farm - Sec 23	147-92323	2,720 Swine - 55 lbs. or More
Jennie-O Turkey Store - Deerfield Farm	147-50007	144,000 Turkeys
Wingspan LLP	161-50012	7,200 Swine - 55 lbs. or More
Woodville Pork	161-50011	2,400 Swine – 55 lbs. or More 1,800 Swine – under 55 lbs.

Table 5.26C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Faribault	20,818	Designated by rule; > 10,000 population
Owatonna	22,434	Designated by rule; > 10,000 population
Northfield	17,147	Designated by rule; > 10,000 population
Waseca	8,493	Designated by rule; > 10,000 population and within ½ mile of an impaired water (Clear Lake)

Table 5.26D. Monthly Fecal Coliform Loading Capacities and Allocations - Cannon River, Northfield Dam to Lake Byllesby Inlet (AUID: 07040002-509)

Drainage Area (square miles):	957					
USGS gage used to develop flow zones and loading capacities: Cannon River at Welch						
% MS4 Urban:	4%					
Total WWTF Design Flow (mgd):	18.2328					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		273.01	98.81	46.19	21.84	10.05
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		4.14	4.14	4.14	4.14	4.14
Communities Subject to MS4 NPDES Requirements		6.82	2.47	1.07	0.35	0.11
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		167.38	60.70	26.31	8.56	2.62
Margin of Safety		94.67	31.50	14.67	8.79	3.18
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		1.5%	4.2%	9.0%	19.0%	41.2%
Communities Subject to MS4 NPDES Requirements		2.5%	2.5%	2.3%	1.6%	1.1%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		61.3%	61.4%	57.0%	39.2%	26.1%
Margin of Safety		34.7%	31.9%	31.8%	40.2%	31.6%

5.27 Straight River, Rush Creek to Cannon River (AUID: 07040002-515)

The 13-mile reach of the Straight River from Rush Creek to the Cannon River was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was monitoring work carried out by the Cannon River Watershed Partnership and MPCA in 1999 and 2000.

The drainage area to the downstream end of this impaired reach is 461 square miles. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (80%), much of which has surface (ditches) and subsurface (tile) drainage. The watershed includes five communities and a highway rest area served by permitted wastewater treatment facilities (Table 5.27A); and 14 livestock facilities that have been issued NPDES permits (Table 5.27B). Approximately 11,000 acres, or 4% of the watershed, will require coverage under MS4 permits. This includes the City of Owatonna, and about 40% of the City of Faribault (Table 5.27C). Stormwater from the remainder of Faribault enters the Cannon River downstream of the confluence with the Straight. An additional 1% of the watershed area contains smaller towns and rural residences.

Table 5.27D describes the monthly fecal coliform loading capacities for this reach of the Straight River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the other allocations.

Table 5.27A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Ellendale WWTP	MN0041564	0.1003	0.02
Faribault WWTP	MN0030121	7	1.59
Geneva WWTP	MN0021008	0.069	0.02
MNDOT Straight River Rest Area	MN0049514	0.0093	0.002
Medford WWTP	MN0024112	0.09	0.02
Owatonna WWTP	MN0051284	5	1.14
Totals		12.27	2.79

Table 5.27B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Jennie-O Turkey Store - Hillcrest Farm	131-50006	144,000 Turkeys
Ahlman Hog Farm Sec 11	147-50002	4,000 Swine - 55 lbs. or More
Heers Family Farm	147-50006	4,000 Swine - 55 lbs. or More
Jennie-O Turkey Store - Merton Farm	147-50008	144,000 Turkeys
Steven Jaster Farm	147-50005	4,000 Swine - 55 lbs. or More

Chad Johnson Farm	047-102279	3,120 Swine - 55 lbs. or More
Brian Waage Farm	147-50003	4,000 Swine - 55 lbs. or More
J&K Farms LLC	147-92330	4,800 Swine - 55 lbs. or More
Jeff Ptacek Farm - Sec 36	147-92217	4,000 Swine - 55 lbs. or More
Shane & Rod Wagner Farm - Sec 15	147-92127	4,400 Swine - 55 lbs. or More
Brian J Kosel Farm - Sec 23	147-92323	2,720 Swine - 55 lbs. or More
Jennie-O Turkey Store - Deerfield Farm	147-50007	144,000 Turkeys
Wingspan LLP	161-50012	7,200 Swine - 55 lbs. or More
Woodville Pork	161-50011	2,400 Swine – 55 lbs. or More 1,800 Swine – under 55 lbs.

Table 5.27C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Faribault	20,818	Designated by rule; > 10,000 population
Owatonna	22,434	Designated by rule; > 10,000 population

Table 5.27D. Monthly Fecal Coliform Loading Capacities and Allocations - Straight River, Rush Creek to Cannon River (AUID: 07040002-515)

Drainage Area (square miles):	461					
USGS gage used to develop flow zones and loading capacities:						
Straight River near Faribault						
% MS4 Urban:	4%					
Total WWTF Design Flow (mgd):	12.2686					
		Flow Zone				
		High	Moist	Mid	Dry	*Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		171.86	77.15	36.03	13.70	5.06
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		2.79	2.79	2.79	2.79	2.79
Communities Subject to MS4 NPDES Requirements		4.84	1.78	0.80	0.14	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		120.52	44.27	19.99	3.60	0.00
Margin of Safety		43.72	28.32	12.45	7.17	2.27
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		1.6%	3.6%	7.7%	20.3%	55.1%
Communities Subject to MS4 NPDES Requirements		2.8%	2.3%	2.2%	1.1%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		70.1%	57.4%	55.5%	26.3%	0.0%
Margin of Safety		25.4%	36.7%	34.6%	52.3%	44.9%
*note - WWTF design flow exceeded minimum low flow; see section 5.1 for description of approach to allocation						

5.28 Rush Creek, Headwaters to Straight River (AUID: 07040002-505)

The 12-mile reach of Rush Creek was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was monitoring work carried out by the Cannon River Watershed Partnership and MPCA in 1999 and 2000.

The drainage area to the downstream end of this impaired reach is 22 square miles, all of which falls in Rice County. Cultivated land accounts for 89% of the watershed upstream of the impaired reach, a figure which is second highest among all impaired reach watersheds included in this report (Table 2.1). The watershed has no communities served by permitted wastewater treatment facilities (Table 5.28A), and no livestock facilities that have been issued NPDES permits (Table 5.28B). At the present time, none of the watershed requires coverage under a MS4 permit (Table 5.28C).

Table 5.28D describes the monthly fecal coliform loading capacities for Rush Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.28A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.28B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.28C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.28D. Monthly Fecal Coliform Loading Capacities and Allocations - Rush Creek, Headwaters to Straight River (AUID: 07040002-505)

Drainage Area (square miles):	22					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		8.35	3.75	1.75	0.67	0.25
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		6.22	2.37	1.14	0.32	0.12
Margin of Safety		2.13	1.38	0.61	0.35	0.13
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.0%	0.0%	0.0%	0.0%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		74.5%	63.2%	65.1%	47.8%	48.0%
Margin of Safety		25.5%	36.8%	34.9%	52.2%	52.0%

5.29 Crane Creek, Headwaters to Straight River (AUID: 07040002-516)

The 16-mile reach of Crane Creek was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was monitoring work carried out by the Cannon River Watershed Partnership and MPCA in 1999 and 2000.

The drainage area to the downstream end of this impaired reach is 106 square miles, including land in Waseca and Steele counties. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (81%), much of which has surface (ditches) and subsurface (tile) drainage. A good portion of Crane Creek itself is a drainage ditch. The watershed has no communities served by permitted wastewater treatment facilities (Table 5.29A), but contains four livestock facilities that have been issued NPDES permits (Table 5.29B). Approximately 3,000 acres of the City of Waseca, or 5% of the watershed, will require coverage under an MS4 permit (Table 5.29C). Unlike its stormwater, wastewater from the City of Waseca is discharged to the Minnesota River Basin. An additional 1% of the watershed area contains smaller towns and rural residences.

Table 5.29D describes the monthly fecal coliform loading capacities for Crane Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were derived using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.29A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.29B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Brian J Kosel Farm - Sec 23	147-92323	2,720 Swine - 55 lbs. or More
Jennie-O Turkey Store - Deerfield Farm	147-50007	144,000 Turkeys
Wingspan LLP	161-50012	7,200 Swine - 55 lbs. or More
Woodville Pork	161-50011	2,400 Swine – 55 lbs. or More 1,800 Swine – under 55 lbs.

Table 5.29C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Waseca	8,493	Designated by rule; > 10,000 population and within ½ mile of an impaired water (Clear Lake)

Table 5.29D. Monthly Fecal Coliform Loading Capacities and Allocations - Crane Creek, Headwaters to Straight River (AUID: 07040002-516)

Drainage Area (square miles):	106					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	5%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		39.38	17.68	8.26	3.14	1.16
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		1.37	0.52	0.25	0.07	0.03
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		27.99	10.67	5.16	1.43	0.53
Margin of Safety		10.02	6.49	2.85	1.64	0.60
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.0%	0.0%	0.0%	0.0%
Communities Subject to MS4 NPDES Requirements		3.5%	3.0%	3.1%	2.2%	2.3%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		71.1%	60.3%	62.4%	45.5%	46.0%
Margin of Safety		25.4%	36.7%	34.5%	52.2%	51.7%

5.30 Straight River, Maple Creek to Crane Creek (AUID: 07040002-503)

The 5-mile reach of the Straight River from Maple Creek to Crane Creek was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program, although more recent monitoring was conducted by the MPCA and Cannon River Watershed Partnership.

The drainage area to the downstream end of this impaired reach is 252 square miles, almost all of which is within Steele County. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (82%), much of which has surface (ditches) and subsurface (tile) drainage. The watershed includes three communities and a highway rest area served by permitted wastewater treatment facilities (Table 5.30A), and five livestock facilities that have been issued NPDES permits (Table 5.30B). Approximately 8,000 acres of the City of Owatonna, or 5% of the watershed, will require coverage under MS4 permits (Table 5.30C).

Table 5.30D describes the monthly fecal coliform loading capacities for this reach of the Straight River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.30A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Ellendale WWTP	MN0041564	0.1003	0.02
Geneva WWTP	MN0021008	0.069	0.02
MNDOT Straight River Rest Area	MN0049514	0.0093	0.002
Owatonna WWTP	MN0051284	5	1.14
Totals		5.18	1.18

Table 5.30B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Chad Johnson Farm	047-102279	3,120 Swine - 55 lbs. or More
Brian Waage Farm	147-50003	4,000 Swine - 55 lbs. or More
J&K Farms LLC	147-92330	4,800 Swine - 55 lbs. or More
Jeff Ptacek Farm - Sec 36	147-92217	4,000 Swine - 55 lbs. or More
Shane & Rod Wagner Farm - Sec 15	147-92127	4,400 Swine - 55 lbs. or More

Table 5.30C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Owatonna	22,434	Designated by rule; > 10,000 population

Table 5.30D. Monthly Fecal Coliform Loading Capacities and Allocations - Straight River, Maple Creek to Crane Creek (AUID: 07040002-503)

Drainage Area (square miles):	252				
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault					
% MS4 Urban:	5%				
Total WWTF Design Flow (mgd):	5.1786				
	Flow Zone				
	High	Moist	Mid	Dry	Low
	values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY	93.99	42.19	19.71	7.49	2.77
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	1.18	1.18	1.18	1.18	1.18
Communities Subject to MS4 NPDES Requirements	3.46	1.28	0.59	0.12	0.01
Livestock Facilities Requiring NPDES Permits	0	0	0	0	0
"Straight Pipe" Septic Systems	0	0	0	0	0
Load Allocation	65.45	24.24	11.14	2.27	0.16
Margin of Safety	23.91	15.49	6.81	3.92	1.43
	values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY	100%	100%	100%	100%	100%
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	1.3%	2.8%	6.0%	15.7%	42.5%
Communities Subject to MS4 NPDES Requirements	3.7%	3.0%	3.0%	1.6%	0.3%
Livestock Facilities Requiring NPDES Permits	0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems	0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation	69.6%	57.5%	56.5%	30.4%	5.6%
Margin of Safety	25.4%	36.7%	34.6%	52.3%	51.6%

5.31 Maple Creek, Headwaters to Straight River (AUID: 07040002-519)

The 12-mile reach of Maple Creek was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was monitoring work carried out by the Cannon River Watershed Partnership and MPCA in 1999 and 2000.

The drainage area to the downstream end of this impaired reach is 38 square miles, lying completely in Steele County. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (81%), although it has a higher percentage of grassland (11%) than any other Straight River subwatershed. The watershed has no communities served by permitted wastewater treatment facilities (Table 5.31A) and no livestock facilities that have been issued NPDES permits (Table 5.31B). Approximately 3,600 acres (roughly 45% of the City of Owatonna), or 15% of the watershed, will require coverage under a MS4 permit (Table 5.31C).

Table 5.31D describes the monthly fecal coliform loading capacities for Maple Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacity was derived using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.31A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.31B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.31C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Owatonna	22,434	Designated by rule; > 10,000 population

Table 5.31D. Monthly Fecal Coliform Loading Capacities and Allocations - Maple Creek, Headwaters to Straight River (AUID: 07040002-519)

Drainage Area (square miles):	38					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	15%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		14.36	6.45	3.01	1.14	0.42
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		1.58	0.60	0.29	0.08	0.03
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		9.13	3.48	1.68	0.46	0.17
Margin of Safety		3.65	2.37	1.04	0.60	0.22
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.0%	0.0%	0.0%	0.0%
Communities Subject to MS4 NPDES Requirements		11.0%	9.4%	9.7%	7.0%	7.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		63.5%	53.9%	55.8%	40.4%	40.6%
Margin of Safety		25.4%	36.7%	34.6%	52.6%	52.4%

5.32 Straight River, Turtle Creek to Owatonna Dam (AUID: 07040002-535)

The 7-mile reach of the Straight River was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was monitoring work carried out by Steele County Environmental Services in 2000-2002.

The drainage area to the downstream end of this impaired reach is 204 square miles, almost all of which is within Steele County. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (83%), much of which has surface (ditches) and subsurface (tile) drainage. The watershed has two small communities and a highway rest area with permitted facilities contributing wastewater to the impaired reach (Table 5.32A); and contains five livestock facilities that have been issued NPDES permits (Table 5.32B). Approximately 2,700 acres (roughly 1/3 of the City of Owatonna), or 2% of the watershed, will require coverage under a MS4 permit (Table 5.32C).

Table 5.32D describes the monthly fecal coliform loading capacities for this reach of the Straight River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were derived using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.32A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Ellendale WWTP	MN0041564	0.1003	0.02
Geneva WWTP	MN0021008	0.069	0.02
MNDOT Straight River Rest Area	MN0049514	0.0093	0.002
Totals		0.18	0.042

Table 5.32B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Chad Johnson Farm	047-102279	3,120 Swine - 55 lbs. or More
Brian Waage Farm	147-50003	4,000 Swine - 55 lbs. or More
J&K Farms LLC	147-92330	4,800 Swine - 55 lbs. or More
Jeff Ptacek Farm - Sec 36	147-92217	4,000 Swine - 55 lbs. or More
Shane & Rod Wagner Farm - Sec 15	147-92127	4,400 Swine - 55 lbs. or More

Table 5.32C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Owatonna	22,434	Designated by rule; > 10,000 population

Table 5.32D. Monthly Fecal Coliform Loading Capacities and Allocations - Straight River, Turtle Creek to Owatonna Dam (AUID: 07040002-535)

Drainage Area (square miles):	204					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	2%					
Total WWTF Design Flow (mgd):	0.1786					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		76.05	34.14	15.94	6.06	2.24
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.04	0.04	0.04	0.04	0.04
Communities Subject to MS4 NPDES Requirements		1.17	0.45	0.21	0.06	0.02
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		55.49	21.12	10.17	2.79	1.03
Margin of Safety		19.35	12.53	5.51	3.17	1.15
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.1%	0.1%	0.3%	0.7%	1.8%
Communities Subject to MS4 NPDES Requirements		1.5%	1.3%	1.3%	1.0%	1.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		73.0%	61.9%	63.8%	46.0%	45.9%
Margin of Safety		25.4%	36.7%	34.6%	52.3%	51.3%

5.33 Turtle Creek, Headwaters to Straight River (AUID: 07040002-518)

The 17-mile reach of Turtle Creek was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was monitoring work carried out by the Cannon River Watershed Partnership and MPCA in 1999 and 2000.

The drainage area to the downstream end of this impaired reach is 44 square miles, all of which falls in Steele County. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (82%), much of which has surface (ditches) and subsurface (tile) drainage. The watershed has no communities served by wastewater treatment facilities (Table 5.33A), but contains two livestock facilities that have been issued NPDES permits (Table 5.33B). At the present time, none of the watershed requires coverage under a MS4 permit (Table 5.33C).

Table 5.33D describes the monthly fecal coliform loading capacities for Turtle Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacity was derived using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations

Table 5.33A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.33B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Jeff Ptacek Farm - Sec 36	147-92217	4,000 Swine - 55 lbs. or More
Shane & Rod Wagner Farm - Sec 15	147-92127	4,400 Swine - 55 lbs. or More

Table 5.33C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.33D. Monthly Fecal Coliform Loading Capacities and Allocations - Turtle Creek, Headwaters to Straight River (AUID: 07040002-518)

Drainage Area (square miles):	44					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		16.41	7.37	3.44	1.31	0.48
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		12.23	4.67	2.25	0.63	0.23
Margin of Safety		4.18	2.70	1.19	0.68	0.25
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.0%	0.0%	0.0%	0.0%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		74.5%	63.4%	65.4%	48.1%	47.9%
Margin of Safety		25.5%	36.6%	34.6%	51.9%	52.1%

5.34 Straight River, County Ditch 25 to Turtle Creek (AUID: 07040002-517)

The 10-mile reach of the Straight River was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was monitoring work carried out by the Cannon River Watershed Partnership and MPCA in 1999 and 2000.

The drainage area to the downstream end of this impaired reach is 135 square miles, almost all of which is within Steele County. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (87%), much of which has surface (ditches) and subsurface (tile) drainage. The watershed has two small communities and a highway rest area with permitted facilities contributing wastewater to the impaired reach (Table 5.34A); and contains three livestock facilities that have been issued NPDES permits (Table 5.34B). At the present time, none of the watershed requires coverage under an MS4 permit (Table 5.34C). A prominent feature in the upper portion of this watershed is the large "Straight River Marsh" wetland restoration project.

Table 5.34D describes the monthly fecal coliform loading capacities for this reach of the Straight River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were derived using flow data from the USGS gage site on the Straight River near Faribault as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.34A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Ellendale WWTP	MN0041564	0.1003	0.02
Geneva WWTP	MN0021008	0.069	0.02
MNDOT Straight River Rest Area	MN0049514	0.0093	0.002
Totals		0.18	0.042

Table 5.34B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Chad Johnson Farm	047-102279	3,120 Swine - 55 lbs. or More
Brian Waage Farm	147-50003	4,000 Swine - 55 lbs. or More
J&K Farms LLC	147-92330	4,800 Swine - 55 lbs. or More

Table 5.34C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.34D. Monthly Fecal Coliform Loading Capacities and Allocations - Straight River, County Ditch 25 to Turtle Creek (AUID: 07040002-517)

Drainage Area (square miles):	135					
USGS gage used to develop flow zones and loading capacities: Straight River near Faribault						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0.1786					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		50.27	22.57	10.54	4.01	1.48
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.04	0.04	0.04	0.04	0.04
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		37.44	14.25	6.86	1.87	0.68
Margin of Safety		12.79	8.28	3.64	2.10	0.76
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.1%	0.2%	0.4%	1.0%	2.7%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		74.5%	63.1%	65.1%	46.6%	45.9%
Margin of Safety		25.4%	36.7%	34.5%	52.4%	51.4%

5.35 Root River, Thompson Creek to the Mississippi River (AUID: 07040008-501)

The 6-mile reach of the Root River from Thompson Creek to the Mississippi was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 1,660 square miles (the entire Root River watershed). Even in this large of a watershed, pollution sources in the uppermost portions of the watershed can influence water quality near the mouth. Land use (Table 2.1) is primarily a mix of cultivated land, forest, and grassland. The watershed includes 17 communities and 2 highway rest areas served by permitted wastewater treatment facilities (Table 5.35A); and 19 livestock facilities that have been issued NPDES permits (Table 5.35B). There are no communities that will require coverage under MS4 permits at this time (Table 5.35C).

Table 5.35D describes the monthly fecal coliform loading capacities for this reach of the Cannon River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed for five flow zones using flow data from the USGS gage site on the Root River near Houston as described in Appendix A. Flows from the wastewater treatment facilities in the watershed are small relative to river flows, even during drier time periods. As such, the wasteload allocations provided to these facilities is relatively small. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.35A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Canton WWTP	MN0023001	0.065	0.01
Chatfield WWTP	MN0021857	0.2725	0.06
Dexter WWTP	MN0023183	0.0454	0.01
Grand Meadow WWTP	MN0023558	0.12	0.03
Haven Hutterian Brethren	MNG580071	0.0112	0.003
Hokah WWTP	MN0021458	0.1	0.02
Houston WWTP	MN0023736	0.25	0.06
Lanesboro WWTP	MN0020044	0.096	0.02
MNDOT Enterprise Rest Area	MN0048844	0.0026	0.001
MNDOT High Forest Rest Area	MN0044377	0.0033	0.001
Mabel WWTP	MN0020877	0.136	0.03
Ostrander WWTP	MN0024449	0.0394	0.01
Peterson WWTP	MN0024490	0.025	0.01
Preston WWTP	MN0020745	0.317	0.07
Racine WWTP	MN0024554	0.039	0.01
Rushford WWTP	MN0024678	0.15	0.03
Spring Valley WWTP	MN0051934	0.936	0.21
Stewartville WWTP	MN0020681	1.111	0.25
Wykoff WWTP	MN0020826	0.049	0.01
Totals		3.77	0.86

Table 5.35B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Allen & Kevin Marzolf Farm - Sec 30	045-90428	4,000 Swine - 55 lbs. or More
Helen Anderson Farm - Sec 36	045-91101	1,196 Other Cattle
Hellickson Farms	045-63730	3,300 Swine - 55 lbs. or More
Jennie-O Turkey Store - Benson Farm	045-50004	63,700 Turkeys
Jennie-O Turkey Store - Chatfield Farm	045-50003	107,841 Turkeys
Jennie-O Turkey Store - Fay Farm	045-50002	63,600 Turkeys
Marzolf Farm	045-60160	4,000 Swine - 55 lbs. or More
Palmer Growout Farm - Sec 14	045-101381	107,841 Turkeys
Palmer Growout Farm - Sec 8	045-101373	63,000 Turkeys
Palmer Growout Farm - Sec 8 NW	045-101374	63,700 Turkeys
Paul Schmidt Farm - Sec 20	045-90124	4,000 Swine - 55 lbs. or More
Ridge Land Farm	045-50001	4,000 Swine - 55 lbs. or More
John Oehlke Pork Farm	099-83512	3,600 Swine - 55 lbs. or More
Larson Products Inc - Sec 5	099-61683	60,000 Turkeys
Vance Larson Farm 1	099-95037	68,000 Turkeys
Lo-Mill Farms	109-79271	2,800 Swine - 55 lbs. or More
Jennie-O Turkey Store - Lingenfelter	169-50005	69,750 Turkeys
Smith Farms of Rushford Inc	169-50001	4,150 Swine - 55 lbs. or More
Smith Farms of Rushford LLP	169-102822	3,600 Swine - 55 lbs. or More

Table 5.35C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.35D. Monthly Fecal Coliform Loading Capacities and Allocations - Root River, Thompson Creek to the Mississippi River (AUID: 07040008-501)

Drainage Area (square miles):	1,660				
USGS gage used to develop flow zones and loading capacities:	Root River near Houston				
% MS4 Urban:	0%				
Total WWTF Design Flow (mgd):	3.7684				
	Flow Zone				
	High	Moist	Mid	Dry	Low
	values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY	413.07	201.09	132.33	88.11	55.45
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	0.86	0.86	0.86	0.86	0.86
Communities Subject to MS4 NPDES Requirements	0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits	0	0	0	0	0
"Straight Pipe" Septic Systems	0	0	0	0	0
Load Allocation	329.40	155.76	113.32	63.96	40.65
Margin of Safety	82.81	44.47	18.15	23.29	13.94
	values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY	100%	100%	100%	100%	100%
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	0.2%	0.4%	0.6%	1.0%	1.5%
Communities Subject to MS4 NPDES Requirements	0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits	0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems	0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation	79.7%	77.5%	85.6%	72.6%	73.3%
Margin of Safety	20.0%	22.1%	13.7%	26.4%	25.1%

**5.36 Robinson Creek, Headwaters to North Branch Root River
(AUID: 07040008-503)**

Robinson Creek was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 17 square miles. Most of which falls within Mower County, although the confluence with the North Branch Root River is in Olmsted County. Land use in the watershed upstream of the impairment (Table 2.1) is 92% cultivated, highest of all impaired stream and river reaches included in this report. The watershed contains no communities served by permitted wastewater treatment facilities (Table 5.36A); and no livestock facilities that have been issued NPDES permits (Table 5.36B). At the present time, none of the watershed requires coverage under a MS4 permit (Table 5.36C).

Table 5.36D describes the monthly fecal coliform loading capacities for Robinson Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the South Fork Zumbro River at Rochester as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.36A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.36B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.36C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.36D. Monthly Fecal Coliform Loading Capacities and Allocations - Robinson Creek, Headwaters to North Branch Root River (AUID: 07040008-503)

Drainage Area (square miles):	17					
USGS gage used to develop flow zones and loading capacities: South Fork Zumbro River at Rochester						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		5.93	2.64	1.42	0.81	0.29
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		4.72	1.80	1.15	0.49	0.16
Margin of Safety		1.21	0.84	0.27	0.32	0.13
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.0%	0.0%	0.0%	0.0%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		79.6%	68.2%	81.0%	60.5%	55.2%
Margin of Safety		20.4%	31.8%	19.0%	39.5%	44.8%

**5.37 Money Creek; End of Trout Stream portion to Root River
(AUID: 07040008-521)**

Money Creek was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was a special study conducted by the Winona County Environmental Services Department.

The drainage area to the downstream end of this impaired reach is 77 square miles, all of which falls within Winona County. Land use in the watershed upstream of the impairment (Table 2.1) is a mix of forest (44%), cultivated land, and grassland. The percentage of cultivated land (36%) is the lowest of all the impaired stream and river reaches included in the report. The watershed contains no communities served by permitted wastewater treatment facilities (Table 5.37A) and no livestock facilities that have been issued NPDES permits (Table 5.37B). At the present time, none of the watershed requires coverage under a MS4 permit (Table 5.37C).

Table 5.37D describes the monthly fecal coliform loading capacities for Money Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the Rush Creek near Rushford as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.37A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.37B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.37C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.37D. Monthly Fecal Coliform Loading Capacities and Allocations - Money Creek, End of Trout Stream portion to Root River (AUID: 07040008-521)

Drainage Area (square miles):	77					
USGS gage used to develop flow zones and loading capacities: Rush Creek near Rushford						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		7.66	4.99	3.81	3.25	2.72
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		6.10	4.14	3.55	2.95	2.42
Margin of Safety		1.56	0.85	0.26	0.30	0.30
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.0%	0.0%	0.0%	0.0%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		79.6%	83.0%	93.2%	90.8%	89.0%
Margin of Safety		20.4%	17.0%	6.8%	9.2%	11.0%

**5.38 South Branch Root River, Canfield Creek to Willow Creek
(AUID: 07040008-555)**

The 11-mile reach of the South Branch Root River from Canfield Creek to Willow Creek was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was the locally-led South Branch Root River watershed project.

The drainage area to the downstream end of this impaired reach is 143 square miles. This watershed includes land in Mower and Fillmore counties and encompasses Forestville/Mystery Cave State Park. Land use (Table 2.1) is dominated by cultivated land (76%), but includes substantial areas of forest and grassland. The watershed includes one community (Ostrander) served by a permitted wastewater treatment facility (Table 5.38A), and three livestock facilities that have been issued NPDES permits (Table 5.38B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.38C).

Table 5.38D describes the monthly fecal coliform loading capacities for this reach of the South Branch Root River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the South Fork Root River near Houston as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.38A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Ostrander WWTP	MN0024449	0.0394	0.01

Table 5.38B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Hellickson Farms	045-63730	3,300 Swine - 55 lbs. or More
Paul Schmidt Farm - Sec 20	045-90124	4,000 Swine - 55 lbs. or More
Ridge Land Farm	045-50001	4,000 Swine - 55 lbs. or More

Table 5.38C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.38D. Monthly Fecal Coliform Loading Capacities and Allocations - South Branch Root River, Canfield Creek to Willow Creek (AUID: 07040008-555)

Drainage Area (square miles):	143					
USGS gage used to develop flow zones and loading capacities: South Fork Root River near Houston						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0.0394					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		23.16	12.77	9.48	7.10	5.59
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.01	0.01	0.01	0.01	0.01
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		18.00	10.54	8.61	5.98	4.61
Margin of Safety		5.15	2.22	0.86	1.11	0.97
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.0%	0.1%	0.1%	0.1%	0.2%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		77.7%	82.5%	90.8%	84.2%	82.5%
Margin of Safety		22.2%	17.4%	9.1%	15.6%	17.4%

**5.39 South Branch Root River, Headwaters to Class 1B, 2A, 3B
(AUID: 07040008-586)**

The 10-mile reach of the South Branch Root River from it's headwaters to the Class 1B, 2A, 3B section was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was the locally-led South Branch Root River watershed project.

The drainage area to the downstream end of this impaired reach is 61 square miles. This watershed includes land in Mower and Fillmore counties and encompasses Forestville/Mystery Cave State Park. Land use (Table 2.1) is dominated by cultivated land (84%), much of which has surface (ditches) and subsurface (tile) drainage. The watershed includes one community (Ostrander) served by a wastewater treatment facility (Table 5.39A); and no livestock facilities that have been issued NPDES permits (Table 5.39B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.39C).

Table 5.39D describes the monthly fecal coliform loading capacities for this reach of the South Branch Root River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the South Fork Root River near Houston as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.39A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Ostrander WWTP	MN0024449	0.0394	0.01

Table 5.39B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.39C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.39D. Monthly Fecal Coliform Loading Capacities and Allocations - South Branch Root River, Headwaters to Class 1B, 2A, 3B (AUID: 07040008-586)

Drainage Area (square miles):	61					
USGS gage used to develop flow zones and loading capacities: South Fork Root River near Houston						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0.0394					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		9.86	5.43	4.03	3.02	2.38
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.01	0.01	0.01	0.01	0.01
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		7.66	4.48	3.65	2.54	1.96
Margin of Safety		2.19	0.94	0.37	0.47	0.41
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.1%	0.2%	0.2%	0.3%	0.4%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		77.7%	82.5%	90.6%	84.1%	82.4%
Margin of Safety		22.2%	17.3%	9.2%	15.6%	17.2%

5.40 Whitewater River, Middle Fork; trout stream portion (AUID: 07040003-514)

The 12-mile reach of the Middle Fork Whitewater River was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was a 2000-2002 cooperative monitoring efforts involving the Whitewater River watershed project and Winona State University.

The drainage area to the downstream end of this impaired reach is 54 square miles in Olmsted and Winona counties. Land use (Table 2.1) is primarily cultivated (69%), but includes substantial areas of grassland and forest. The watershed does not contain any communities served by permitted wastewater treatment systems (Table 5.40A). One livestock facility is covered under and NPDES permit (Table 5.40B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.40C).

Table 5.40D describes the monthly fecal coliform loading capacities for this reach of the Whitewater River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the South Fork Whitewater River near Altura as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.40A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.40B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Holden Farms Inc.	169-60300	3,200 Swine - 55 lbs. or More

Table 5.40C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.40D. Monthly Fecal Coliform Loading Capacities and Allocations - Whitewater River, Middle Fork; trout stream portion (AUID: 07040003-514)

Drainage Area (square miles):	54					
USGS gage used to develop flow zones and loading capacities: South Fork Whitewater near Altura						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		6.74	3.27	2.04	1.46	1.14
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		4.95	2.35	1.77	1.27	0.92
Margin of Safety		1.79	0.92	0.27	0.19	0.22
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0%	0%	0%	0%	0%
Communities Subject to MS4 NPDES Requirements		0%	0%	0%	0%	0%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		73%	72%	87%	87%	81%
Margin of Safety		27%	28%	13%	13%	19%

5.41 Whitewater River, South Fork; trout stream portion above North Fork Whitewater River (AUID: 07040003-512)

The 11-mile reach of the South Fork Whitewater River was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was a 2000-2002 cooperative monitoring efforts involving the Whitewater River watershed project and Winona State University.

The drainage area to the downstream end of this impaired reach is 93 square miles in Olmsted and Winona counties. Land use (Table 2.1) is primarily cultivated (64%), but includes substantial areas of grassland and forest. The watershed contains three communities served by permitted wastewater treatment systems (Table 5.41A); and two livestock facilities that have been issued NPDES permits (Table 5.41B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.41C).

Table 5.41D describes the monthly fecal coliform loading capacities for this reach of the Whitewater River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the South Fork Whitewater River near Altura as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.41A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Altura WWTP	MN0021831	0.2693	0.06
Utica WWTP	MNG580069	0.04	0.01
Whitewater River Pollution Control Facility	MN0046868	1.12	0.25
Totals		1.43	0.32

Table 5.41B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Gar-Lin Dairy Site 1	109-82692	918 Mature Dairy Cows
Daley Farms of Lewiston LLP	169-50002	1,426 Mature Dairy Cows

Table 5.41C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.41D. Monthly Fecal Coliform Loading Capacities and Allocations - Whitewater River, South Fork; trout stream portion above North Fork Whitewater River (AUID: 07040003-512)

Drainage Area (square miles):	93					
USGS gage used to develop flow zones and loading capacities: South Fork Whitewater near Altura						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	1.4293					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		11.68	5.66	3.53	2.53	1.98
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.32	0.32	0.32	0.32	0.32
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		8.25	3.74	2.75	1.88	1.28
Margin of Safety		3.11	1.60	0.46	0.33	0.38
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		3%	6%	9%	13%	16%
Communities Subject to MS4 NPDES Requirements		0%	0%	0%	0%	0%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		71%	66%	78%	74%	64%
Margin of Safety		27%	28%	13%	13%	19%

**5.42 Whitewater River, South Fork; headwaters to trout stream portion
(AUID: 07040003-505)**

The 20-mile reach of the South Fork Whitewater River was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 55 square miles in Olmsted and Winona counties. Land use (Table 2.1) is primarily cultivated (64%), but includes substantial areas of grassland and forest. The watershed contains one community (St. Charles) served by a permitted wastewater treatment facility (Table 5.42A), and one livestock facility that has been issued a NPDES permit (Table 5.42B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.42C).

Table 5.42D describes the monthly fecal coliform loading capacities for this reach of the Whitewater River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the South Fork Whitewater River near Altura as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.42A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Whitewater River Pollution Control Facility	MN0046868	1.12	0.25

Table 5.42B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Gar-Lin Dairy Site 1	109-82692	918 Mature Dairy Cows

Table 5.42C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.42D. Monthly Fecal Coliform Loading Capacities and Allocations - Whitewater River, South Fork; headwaters to trout stream portion (AUID: 07040003-505)

Drainage Area (square miles):	55					
USGS gage used to develop flow zones and loading capacities: South Fork Whitewater near Altura						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	1.12					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		6.93	3.36	2.10	1.50	1.18
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.25	0.25	0.25	0.25	0.25
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		4.84	2.16	1.57	1.05	0.71
Margin of Safety		1.84	0.95	0.28	0.20	0.22
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		4%	8%	12%	17%	22%
Communities Subject to MS4 NPDES Requirements		0%	0%	0%	0%	0%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		70%	64%	75%	70%	60%
Margin of Safety		27%	28%	13%	13%	19%

5.43 Whitewater River, North Fork; unnamed creek to Middle Fork Whitewater River (AUID: 07040003-554)

The 10-mile reach of the North Fork Whitewater River was added to the Section 303(d) Clean Water Act impaired waters list in 1996. The primary source of data that led to this listing was USGS monitoring from 1985 to 1993.

The drainage area to the downstream end of this impaired reach is 104 square miles, including land in Olmsted, Winona, and Wabasha counties. Land use (Table 2.1) is primarily cultivated (70%), but includes substantial areas of grassland and forest. The watershed contains one community served by a permitted wastewater treatment facility (Table 5.43A); and no livestock facilities that have been issued NPDES permits (Table 5.43B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.43C).

Table 5.43D describes the monthly fecal coliform loading capacities for this reach of the Whitewater River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the North Fork Whitewater River near Elba as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.43A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Plainview-Elgin Sanitary District WWTP	MN0055361	1.421	0.32

Table 5.43B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.43C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.43D. Monthly Fecal Coliform Loading Capacities and Allocations - Whitewater River, North Fork; unnamed creek to Middle Fork Whitewater River (AUID: 07040003-554)

Drainage Area (square miles):	104					
USGS gage used to develop flow zones and loading capacities: Norht Fork Whitewater near Elba						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	1.421					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		18.25	8.42	5.69	4.40	2.70
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.32	0.32	0.32	0.32	0.32
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		13.31	6.31	4.92	2.89	1.72
Margin of Safety		4.62	1.79	0.45	1.19	0.66
values expressed as percent of total month loading capacity						
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		2%	4%	6%	7%	12%
Communities Subject to MS4 NPDES Requirements		0%	0%	0%	0%	0%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		73%	75%	86%	66%	64%
Margin of Safety		25%	21%	8%	27%	24%

5.44 Logan Branch; End trout stream portion to North Fork Whitewater River (AUID: 07040003-536)

The 10-mile reach of the Logan Branch was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was the locally-led Whitewater River watershed project.

The drainage area to the downstream end of this impaired reach is 17 square miles, all in Olmsted County. Land use (Table 2.1) is primarily cultivated (68%), but includes substantial areas of grassland and forest. The watershed has no communities served by permitted wastewater treatment facilities (Table 5.44A) and no livestock facilities have been issued NPDES permits (Table 5.44B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.44C).

Table 5.44D describes the monthly fecal coliform loading capacities for this reach of the Whitewater River system to achieve water quality standards, as well as the component wasteload allocation, load allocation, and margin of safety. The loading capacities were derived using historic flow data from a USGS gage site on the North Fork Whitewater River near Elba as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.44A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.44B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.44C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.44D. Monthly Fecal Coliform Loading Capacities and Allocations - Logan Branch; End trout stream portion to North Fork Whitewater River (AUID: 07040003-536)

Drainage Area (square miles):	17					
USGS gage used to develop flow zones and loading capacities: North Fork Whitewater near Elba						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		3.01	1.39	0.94	0.73	0.45
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		2.25	1.09	0.87	0.53	0.34
Margin of Safety		0.76	0.30	0.07	0.20	0.11
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0%	0%	0%	0%	0%
Communities Subject to MS4 NPDES Requirements		0%	0%	0%	0%	0%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		75%	78%	93%	73%	76%
Margin of Safety		25%	22%	7%	27%	24%

**5.45 Whitewater River, North Fork; Unnamed Creek to Unnamed Creek
(AUID: 07040003-553)**

The 8-mile reach of the North Fork Whitewater River was added to the Section 303(d) Clean Water Act impaired waters list in 2002. The primary source of data that led to this listing was a 2000-2002 cooperative monitoring efforts involving the Whitewater River watershed project and Winona State University.

The drainage area to the downstream end of this impaired reach is 20 square miles, including land in Olmsted and Wabasha counties. Land use (Table 2.1) is primarily cultivated (76%), but includes substantial areas of grassland and forest. The watershed has no communities served by permitted wastewater treatment facilities (Table 5.45A), and no livestock facilities have been issued NPDES permits (Table 5.45B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.45C).

Table 5.45D describes the monthly fecal coliform loading capacities for this reach of the Whitewater River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were derived using historic flow data from a USGS gage site on the North Fork Whitewater River near Elba as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.45A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.45B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.45C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.45D. Monthly Fecal Coliform Loading Capacities and Allocations - Whitewater River, North Fork; Unnamed Creek to Unnamed Creek (AUID: 07040003-553)

Drainage Area (square miles):	20					
USGS gage used to develop flow zones and loading capacities: North Fork Whitewater near Elba						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		3.49	1.61	1.09	0.84	0.52
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		2.61	1.27	1.00	0.61	0.39
Margin of Safety		0.88	0.34	0.09	0.23	0.13
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0%	0%	0%	0%	0%
Communities Subject to MS4 NPDES Requirements		0%	0%	0%	0%	0%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		75%	79%	92%	73%	75%
Margin of Safety		25%	21%	8%	27%	25%

5.46 Garvin Brook; Class 1B, 2A,3B portion (AUID: 07040003-542)

The 14-mile reach of Garvin Brook was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 49 square miles, all in Winona County. Land use (Table 2.1) is just under 50% cultivated, and nearly 40% forested (the second highest among watersheds included in this report). The watershed contains one community (Stockton) served by a permitted wastewater treatment facility (Table 5.46A). There are no livestock facilities requiring NPDES permits (Table 5.46B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.46C).

Table 5.46D describes the monthly fecal coliform loading capacities for this reach of Garvin Brook to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on Garvin Brook near Minnesota City as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.46A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Stockton WWTP	MNG580079	0.07	0.02

Table 5.46B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.46C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.46D. Monthly Fecal Coliform Loading Capacities and Allocations - Garvin Brook; Class 1B, 2A,3B portion (AUID: 07040003-542)

Drainage Area (square miles):	49					
USGS gage used to develop flow zones and loading capacities: Garvin Brook near Minnesota City						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0.07					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		7.55	5.84	5.22	4.85	3.56
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.02	0.02	0.02	0.02	0.02
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		6.28	5.53	5.13	3.95	3.20
Margin of Safety		1.25	0.29	0.07	0.88	0.34
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.2%	0.3%	0.3%	0.3%	0.4%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		83.2%	94.8%	98.4%	81.5%	90.0%
Margin of Safety		16.6%	5.0%	1.3%	18.1%	9.6%

**5.47 Stockton Valley Creek; Trout stream portion to Garvin Brook
(AUID: 07040003-559)**

Garvin Brook was added to the Section 303(d) Clean Water Act impaired waters list in 1994. This 6-mile reach of Stockton Valley Creek, a tributary to Garvin Brook, was added to the list in 2002. The primary source of data that led to this listing was a 2000-2002 cooperative monitoring effort between Winona State University and the MPCA.

The drainage area to the downstream end of this impaired reach is 20 square miles, all in Winona County. Land use (Table 2.1) is less than 50% cultivated (third lowest of all watersheds included in this report), with the remainder forest and grassland. The watershed contains no communities served by permitted wastewater treatment facilities (Table 5.47A); and no livestock facilities have been issued NPDES permits (Table 5.47B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.47C).

Table 5.47D describes the monthly fecal coliform loading capacities for this reach of Stockton Valley Creek to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on Straight Valley Creek near Rollingstone as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.47A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.47B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.47C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.47D. Monthly Fecal Coliform Loading Capacities and Allocations - Stockton Valley Creek; Trout stream portion to Garvin Brook (AUID: 07040003-559)

Drainage Area (square miles):	20					
USGS gage used to develop flow zones and loading capacities: Straight Valley Creek near Rollingstone						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		2.20	1.41	1.10	0.95	0.68
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		1.95	1.22	1.05	0.78	0.56
Margin of Safety		0.25	0.19	0.05	0.17	0.12
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0%	0%	0%	0%	0%
Communities Subject to MS4 NPDES Requirements		0%	0%	0%	0%	0%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		89%	87%	95%	82%	82%
Margin of Safety		11%	13%	5%	18%	18%

5.48 Zumbro River; West Indian Creek to Mississippi River (AUID: 07040004-501)

The 23-mile reach of the Zumbro River from West Indian Creek to the Mississippi River was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was a special study carried out by MPCA in 2002.

The drainage area to the downstream end of this impaired reach is 1,488 square miles (the entire Zumbro River watershed). Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (67%), but exhibits substantial areas of forest and grassland, particularly in the eastern portion. The watershed includes 21 communities served by permitted wastewater treatment facilities (Table 5.48A), and 36 livestock facilities that have been issued NPDES permits (Table 5.48B). Approximately 26,000 acres, or 3% of the watershed, will require coverage under MS4 permits. This includes the City of Rochester and adjacent township areas (Table 5.48C). An additional 2% of the watershed area contains smaller towns and rural residences.

Table 5.48D describes the monthly fecal coliform loading capacities for this reach of the Zumbro River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the Zumbro River at Kellogg as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.48A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Bellechester WWTP	MN0022764	0.0245	0.01
Byron WWTP	MN0049239	0.52	0.12
Camp Victory WWTP	MN0067032	0.03	0.01
Claremont WWTP	MN0022187	0.076	0.02
Dodge Center WWTP	MN0021016	0.973	0.22
Goodhue WWTP	MN0020958	0.0999	0.02
Hallmark Terrace Inc	MNG580070	0.018	0.004
Hammond WWTP	MN0066940	0.02971	0.01
Hayfield WWTP	MN0023612	0.41	0.09
Kasson WWTP	MN0050725	0.84	0.19
Kellogg WWTP	MNG580027	0.06	0.01
Kenyon WWTP	MN0021628	0.357	0.08
Mantorville WWTP	MN0021059	0.0621	0.01
Mazeppa WWTP	MN0046752	0.0723	0.02
Pine Island WWTP	MN0024511	0.665	0.15

Rochester WWTP/Water Reclamation Plant	MN0024619	19.1	4.34
Wanamingo WWTP	MN0022209	0.458	0.10
West Concord WWTP	MN0025241	0.095	0.02
Zumbro Falls WWTP	MN0051004	0.0297	0.01
Zumbro Ridge Estates Mobile Home Park	MN0038661	0.025	0.01
Zumbrota WWTP	MN0025330	0.807	0.18
Totals		24.75221	5.620303

Table 5.48B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Craig and Caryl Bendix Farm - Sec 10	039-81804	3,000 Swine - 55 lbs. or More
Craig and Caryl Benedix Farm	039-81805	3,000 Swine - 55 lbs. or More
Craig and Caryl Benedix Farm - Sec 4	039-81794	3,300 Swine - 55 lbs. or More
Daley Farms - Pine Island	039-81902	1,050 Mature Dairy Cows
Durst Bros Dairy - Site I	039-50010	1,286 Mature Dairy Cows
Grandview Hogs of Dodge Center LLP	039-50005	2,554 Swine - 55 lbs. or More
Hutton Farms Inc	039-50002	250,000 Chickens - broilers,
Jennie-O Turkey Store - Claremont East	039-50006	100,000 Turkeys
Jennie-O Turkey Store - Claremont West	039-50008	60,000 Turkeys
Ripley Dairy LLP	039-81909	2,115 Mature Dairy Cows
Toden Farms - Milton Yard	039-81850	1,298 Other Cattle
Toquam Hogs - Barn 2	039-81920	3,920 Swine - 55 lbs. or More
VZ Hogs LLP	039-50004	4,980 Swine - 55 lbs. or More
Wilbert Kern Farm	039-80286	4,300 Swine - 55 lbs. or More
Belvidere Group Partners Farm	049-72978	4,000 Swine - 55 lbs. or More
Bombay Dairy Company Farm	049-72726	710 Mature Dairy Cows
Darvin J Amundson Farm	049-72585	2,500 Swine - 55 lbs. or More
Donnie L Dohrn Farm	049-73262	1,075 Other Cattle
Gene Knott Farm	049-72619	4,000 Swine - 55 lbs. or More
Knott Farms	049-50007	4,000 Swine - 55 lbs. or More
Kohlnhofer Farms Inc - Site I	049-50002	4,000 Swine - 55 lbs. or More
Kohlnhofer Farms Inc - Site III	049-50004	4,500 Swine - 55 lbs. or More
Mike Kohlnhofer Farm	049-72976	4,500 Swine - 55 lbs. or More
Minnesota Family Farms Coop	049-50001	3,050 Swine - 55 lbs. or More
Jerome Foods Inc 3	109-78747	343,000 Turkeys
Manco of FMT Inc	109-50005	3,000 Swine - 55 lbs. or More
Manco of FMT Inc 2	109-82696	3,000 Swine - 55 lbs. or More
Schoenfelder Farms 10	109-79242	1,980 Other Cattle, 6,900 Swine
Schoenfelder Farms LLP - Roch	109-87100	2,280 Other Cattle, 5,915 Swine
David C Johnson Farm	131-50001	3,750 Swine - 55 lbs. or More
Jon W Brower Farm Sec 36	147-61682	4,000 Swine - 55 lbs. or More
Shane Wagner Farm - Sec 23	147-92125	3,000 Swine - 55 lbs. or More
Dan & Matt Arendt Farm	157-94002	3,300 Swine - 55 lbs. or More
Gary Lehnertz Farm	157-86816	730 Mature Dairy Cows
McNallan Dairy	157-94000	710 Mature Dairy Cows
Kenneth Schumacher Farm	157-86651	1,013 Animal Units; cattle, heifers, and calves

Table 5.48C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
City of Rochester and surrounding townships	98,064	Mandatory

Table 5.48D. Monthly Fecal Coliform Loading Capacities and Allocations - Zumbro River; West Indian Creek to Mississippi River (AUID: 07040004-501)

Drainage Area (square miles):	1,488				
USGS gage used to develop flow zones and loading capacities: Zumbro River at Kellogg					
% MS4 Urban:	3%				
Total WWTF Design Flow (mgd):	24.75221				
	Flow Zone				
	High	Moist	Mid	Dry	Low
	values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY	383.01	187.37	106.91	73.11	48.69
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	5.62	5.62	5.62	5.62	5.62
Communities Subject to MS4 NPDES Requirements	7.31	3.40	2.35	1.38	1.05
Livestock Facilities Requiring NPDES Permits	0	0	0	0	0
"Straight Pipe" Septic Systems	0	0	0	0	0
Load Allocation	262.72	122.09	84.54	49.57	37.92
Margin of Safety	107.36	56.26	14.40	16.54	4.10
	values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY	100%	100%	100%	100%	100%
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	1%	3%	5%	8%	12%
Communities Subject to MS4 NPDES Requirements	2%	2%	2%	2%	2%
Livestock Facilities Requiring NPDES Permits	0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems	0%	0%	0%	0%	0%
Load Allocation	69%	65%	79%	68%	78%
Margin of Safety	28%	30%	13%	23%	8%

5.49 Zumbro River; Cold Creek to West Indian Creek (AUID: 07040004-502)

The 23-mile reach of the Zumbro River from Cold Creek to West Indian Creek was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was a special study carried out by MPCA in 2002.

The drainage area to the downstream end of this impaired reach is 1,401 square miles, roughly 95% of the entire Zumbro River watershed. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (67%), but exhibits substantial areas of forest and grassland, particularly in the eastern portion. The watershed includes 20 communities served by permitted wastewater treatment facilities (Table 5.49A), and 34 livestock facilities that have been issued NPDES permits (Table 5.49B). Approximately 26,000 acres, or 3% of the watershed, will require coverage under MS4 permits. This includes the City of Rochester and adjacent township areas (Table 5.49C). An additional 2% of the watershed area contains smaller towns and rural residences.

Table 5.49D describes the monthly fecal coliform loading capacities for this reach of the Zumbro River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using historic flow data from a USGS gage site on the Zumbro River at Kellogg as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.49A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Bellechester WWTP	MN0022764	0.0245	0.01
Byron WWTP	MN0049239	0.52	0.12
Camp Victory WWTP	MN0067032	0.03	0.01
Claremont WWTP	MN0022187	0.076	0.02
Dodge Center WWTP	MN0021016	0.973	0.22
Goodhue WWTP	MN0020958	0.0999	0.02
Hallmark Terrace Inc	MNG580070	0.018	0.004
Hammond WWTP	MN0066940	0.02971	0.01
Hayfield WWTP	MN0023612	0.41	0.09
Kasson WWTP	MN0050725	0.84	0.19
Kenyon WWTP	MN0021628	0.357	0.08
Mantorville WWTP	MN0021059	0.0621	0.01
Mazeppa WWTP	MN0046752	0.0723	0.02
Pine Island WWTP	MN0024511	0.665	0.15
Rochester WWTP/Water Reclamation Plant	MN0024619	19.1	4.34
Wanamingo WWTP	MN0022209	0.458	0.10

West Concord WWTP	MN0025241	0.095	0.02
Zumbro Falls WWTP	MN0051004	0.0297	0.01
Zumbro Ridge Estates Mobile Home Park	MN0038661	0.025	0.01
Zumbrota WWTP	MN0025330	0.807	0.18
Totals		24.69	5.61

Table 5.49B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Craig and Caryl Bendix Farm - Sec 10	039-81804	3,000 Swine - 55 lbs. or More
Craig and Caryl Benedix Farm	039-81805	3,000 Swine - 55 lbs. or More
Craig and Caryl Benedix Farm - Sec 4	039-81794	3,300 Swine - 55 lbs. or More
Daley Farms - Pine Island	039-81902	1,050 Mature Dairy Cows
Durst Bros Dairy - Site I	039-50010	1,286 Mature Dairy Cows
Grandview Hogs of Dodge Center LLP	039-50005	2,554 Swine - 55 lbs. or More
Hutton Farms Inc	039-50002	250,000 Chickens - broilers,
Jennie-O Turkey Store - Claremont East	039-50006	100,000 Turkeys
Jennie-O Turkey Store - Claremont West	039-50008	60,000 Turkeys
Ripley Dairy LLP	039-81909	2,115 Mature Dairy Cows
Toden Farms - Milton Yard	039-81850	1,298 Other Cattle
Toquam Hogs - Barn 2	039-81920	3,920 Swine - 55 lbs. or More
VZ Hogs LLP	039-50004	4,980 Swine - 55 lbs. or More
Wilbert Kern Farm	039-80286	4,300 Swine - 55 lbs. or More
Belvidere Group Partners Farm	049-72978	4,000 Swine - 55 lbs. or More
Bombay Dairy Company Farm	049-72726	710 Mature Dairy Cows
Darvin J Amundson Farm	049-72585	2,500 Swine - 55 lbs. or More
Donnie L Dohrn Farm	049-73262	1,075 Other Cattle
Gene Knott Farm	049-72619	4,000 Swine - 55 lbs. or More
Knott Farms	049-50007	4,000 Swine - 55 lbs. or More
Kohlhofer Farms Inc - Site I	049-50002	4,000 Swine - 55 lbs. or More
Kohlhofer Farms Inc - Site III	049-50004	4,500 Swine - 55 lbs. or More
Mike Kohlhofer Farm	049-72976	4,500 Swine - 55 lbs. or More
Minnesota Family Farms Coop	049-50001	3,050 Swine - 55 lbs. or More
Jerome Foods Inc 3	109-78747	343,000 Turkeys
Manco of FMT Inc	109-50005	3,000 Swine - 55 lbs. or More
Manco of FMT Inc 2	109-82696	3,000 Swine - 55 lbs. or More
Schoenfelder Farms 10	109-79242	1,980 Other Cattle, 6,900 Sw
Schoenfelder Farms LLP - Roch	109-87100	2,280 Other Cattle, 5,915 Sw
David C Johnson Farm	131-50001	3,750 Swine - 55 lbs. or More
Jon W Brower Farm Sec 36	147-61682	4,000 Swine - 55 lbs. or More
Shane Wagner Farm - Sec 23	147-92125	3,000 Swine - 55 lbs. or More
Dan & Matt Arendt Farm	157-94002	3,300 Swine - 55 lbs. or More
Kenneth Schumacher Farm	157-86651	1,013 Animal Units; cattle, heifers, and calves

Table 5.49C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
City of Rochester and surrounding townships	98,064	Mandatory

Table 5.49D. Monthly Fecal Coliform Loading Capacities and Allocations - Zumbro River; Cold Creek to West Indian Creek (AUID: 07040004-502)

Drainage Area (square miles):	1,401				
USGS gage used to develop flow zones and loading capacities:	Zumbro River at Kellogg				
% MS4 Urban:	3%				
Total WWTF Design Flow (mgd):	24.69221				
	Flow Zone				
	High	Moist	Mid	Dry	Low
	values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY	360.62	176.42	100.66	68.83	45.84
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	5.61	5.61	5.61	5.61	5.61
Communities Subject to MS4 NPDES Requirements	7.30	3.39	2.34	1.37	1.05
Livestock Facilities Requiring NPDES Permits	0	0	0	0	0
"Straight Pipe" Septic Systems	0	0	0	0	0
Load Allocation	246.63	114.46	79.15	46.27	35.33
Margin of Safety	101.09	52.97	13.56	15.58	3.86
	values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY	100%	100%	100%	100%	100%
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	2%	3%	6%	8%	12%
Communities Subject to MS4 NPDES Requirements	2%	2%	2%	2%	2%
Livestock Facilities Requiring NPDES Permits	0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems	0%	0%	0%	0%	0%
Load Allocation	68%	65%	79%	67%	77%
Margin of Safety	28%	30%	13%	23%	8%

**5.50 South Fork Zumbro River; Cascade Creek to Lake Zumbro
(AUID: 07040004-507)**

The 12-mile reach of the South Fork Zumbro River from Cascade Creek to Lake Zumbro was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 349 square miles. Land use in the watershed upstream of the impairment (Table 2.1) includes 57% cultivated land, 20% grassland, and 13% urban/industrial. The watershed includes three communities served by permitted wastewater treatment facilities (Table 5.50A), and five livestock facilities that have been issued NPDES permits (Table 5.50B). Approximately 26,000 acres, or 12% of the watershed, will require coverage under MS4 permits. This includes the City of Rochester and adjacent township areas (Table 5.50C).

Table 5.50D describes the monthly fecal coliform loading capacities for this reach of the Zumbro River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Zumbro River at Rochester. The City of Rochester WWTF combined with the relatively high percentage of MS4 area result in large wasteload allocations. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.50A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Hallmark Terrace Inc	MNG580070	0.018	0.004
Rochester WWTP/Water Reclamation Plant	MN0024619	19.1	4.34
Zumbro Ridge Estates Mobile Home Park	MN0038661	0.025	0.01
Totals		19.14	4.35

Table 5.50B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Jerome Foods Inc 3	109-78747	343,000 Turkeys
Manco of FMT Inc	109-50005	3,000 Swine - 55 lbs. or More
Manco of FMT Inc 2	109-82696	3,000 Swine - 55 lbs. or More
Schoenfelder Farms 10	109-79242	1,980 Other Cattle, 6,900 Sw
Schoenfelder Farms LLP - Roch	109-87100	2,280 Other Cattle, 5,915 Sw

Table 5.50C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
City of Rochester and surrounding townships	98,064	Mandatory

Table 5.50D. Monthly Fecal Coliform Loading Capacities and Allocations - South Fork Zumbro River; Cascade Creek to Lake Zumbro (AUID: 07040004-507)

Drainage Area (square miles):	349				
USGS gage used to develop flow zones and loading capacities:	South Fork Zumbro River at Rochester				
% MS4 Urban:	12%				
Total WWTF Design Flow (mgd):	19.143				
	Flow Zone				
	High	Moist	Mid	Dry	Low*
	values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY	121.66	54.27	29.21	16.70	6.00
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	4.35	4.35	4.35	4.35	4.35
Communities Subject to MS4 NPDES Requirements	10.68	3.76	2.23	0.67	0.00
Livestock Facilities Requiring NPDES Permits	0	0	0	0	0
"Straight Pipe" Septic Systems	0	0	0	0	0
Load Allocation	81.84	28.84	17.08	5.17	0.00
Margin of Safety	24.80	17.32	5.55	6.51	1.65
	values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY	100%	100%	100%	100%	100%
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	4%	8%	15%	26%	73%
Communities Subject to MS4 NPDES Requirements	9%	7%	8%	4%	0%
Livestock Facilities Requiring NPDES Permits	0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems	0%	0%	0%	0%	0%
Load Allocation	67%	53%	58%	31%	0%
Margin of Safety	20%	32%	19%	39%	27%

*note - WWTF design flow exceeded minimum flow; see section 5.1 for description of approach to allocation

**5.51 South Fork Zumbro River; Silver Lake Dam to Cascade Creek
(AUID: 07040004-533)**

The 0.2-mile reach of the South Fork Zumbro River from Cascade Creek to Lake Zumbro was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was a special study conducted by the MPCA in 2001.

The drainage area to the downstream end of this impaired reach is 260 square miles. Land use in the watershed upstream of the impairment (Table 2.1) includes 62% cultivated land, 20% grassland, and 10% urban/industrial. The watershed does not include any permitted wastewater treatment facility discharges (Table 5.51A), but does contain five livestock facilities that have been issued NPDES permits (Table 5.51B). Approximately 13,000 acres, or 8% of the watershed, will require coverage under MS4 permits. This includes portions of the City of Rochester and adjacent township areas (Table 5.51C).

Table 5.51D describes the monthly fecal coliform loading capacities for this reach of the Zumbro River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Zumbro River at Rochester as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.51A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.51B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Jerome Foods Inc 3	109-78747	343,000 Turkeys
Manco of FMT Inc	109-50005	3,000 Swine - 55 lbs. or More
Manco of FMT Inc 2	109-82696	3,000 Swine - 55 lbs. or More
Schoenfelder Farms 10	109-79242	1,980 Other Cattle, 6,900 Sw
Schoenfelder Farms LLP - Roch	109-87100	2,280 Other Cattle, 5,915 Sw

Table 5.51C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
City of Rochester and surrounding townships	98,064	Mandatory

Table 5.51D. Monthly Fecal Coliform Loading Capacities and Allocations - South Fork Zumbro River; Silver Lake Dam to Cascade Creek (AUID: 07040004-533)

Drainage Area (square miles):	260					
USGS gage used to develop flow zones and loading capacities: South Fork Zumbro River at Rochester						
% MS4 Urban:	8%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		90.63	40.43	21.76	12.43	4.47
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		5.74	2.19	1.40	0.60	0.20
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		66.42	25.34	16.22	6.98	2.32
Margin of Safety		18.47	12.91	4.14	4.85	1.95
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0%	0%	0%	0%	0%
Communities Subject to MS4 NPDES Requirements		6%	5%	6%	5%	4%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		73%	63%	75%	56%	52%
Margin of Safety		20%	32%	19%	39%	44%

**5.52 South Fork Zumbro River; Bear Creek to Oakwood Dam
(AUID: 07040004-535)**

The 0.5-mile reach of the South Fork Zumbro River from Bear Creek to Oakwood Dam was added to the Section 303(d) Clean Water Act impaired waters list in 2004. Oakwood Dam is no longer present; the location is approximately the upper end of Silver Lake. The primary source of data that led to this listing was a special study conducted by the MPCA in 2001.

The drainage area to the downstream end of this impaired reach is 239 square miles. Land use in the watershed upstream of the impairment (Table 2.1) includes 62% cultivated land, 20% grassland, and 9% urban/industrial. The watershed does not include any permitted wastewater treatment facility discharges (Table 5.52A), but does contain five livestock facilities that have been issued NPDES permits (Table 5.52B). Approximately 12,000 acres, or 8% of the watershed, will require coverage under MS4 permits. This includes portions of the City of Rochester and adjacent township areas (Table 5.52C).

Table 5.52D describes the monthly fecal coliform loading capacities for this reach of the Zumbro River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Zumbro River at Rochester as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.52A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.52B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Jerome Foods Inc 3	109-78747	343,000 Turkeys
Manco of FMT Inc	109-50005	3,000 Swine - 55 lbs. or More
Manco of FMT Inc 2	109-82696	3,000 Swine - 55 lbs. or More
Schoenfelder Farms 10	109-79242	1,980 Other Cattle, 6,900 Sw
Schoenfelder Farms LLP - Roch	109-87100	2,280 Other Cattle, 5,915 Sw

Table 5.52C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
City of Rochester and surrounding townships	98,064	Mandatory

5.52D. Monthly Fecal Coliform Loading Capacities and Allocations - South Fork Zumbro River; Bear Creek to Oakwood Dam (AUID: 07040004-535)

Drainage Area (square miles):	239					
USGS gage used to develop flow zones and loading capacities: South Fork Zumbro River at Rochester						
% MS4 Urban:	8%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		83.37	37.18	20.01	11.44	4.10
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		5.17	1.97	1.26	0.54	0.18
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		61.20	23.34	14.94	6.44	2.12
Margin of Safety		17.00	11.87	3.81	4.45	1.80
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0%	0%	0%	0%	0%
Communities Subject to MS4 NPDES Requirements		6%	5%	6%	5%	4%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		73%	63%	75%	56%	52%
Margin of Safety		20%	32%	19%	39%	44%

5.53 South Fork Zumbro River; Salem Creek to Bear Creek (AUID: 07040004-536)

The 9-mile reach of the South Fork Zumbro River from Salem Creek to Bear Creek was added to the Section 303(d) Clean Water Act impaired waters list in 2004. The primary source of data that led to this listing was a special study conducted by the MPCA in 2001.

The drainage area to the downstream end of this impaired reach is 157 square miles. Land use in the watershed upstream of the impairment (Table 2.1) includes 68% cultivated land, 18% grassland, and 6% urban/industrial. The watershed does not include any permitted wastewater treatment facility discharges (Table 5.53A), but does contain two livestock facilities that have been issued NPDES permits (Table 5.53B). Approximately 4,000 acres, or 4% of the watershed, will require coverage under MS4 permits. This includes portions of the City of Rochester and adjacent township areas (Table 5.53C).

Table 5.53D describes the monthly fecal coliform loading capacities for this reach of the Zumbro River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Zumbro River at Rochester as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.53A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.53B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Manco of FMT Inc	109-50005	3,000 Swine - 55 lbs. or More
Manco of FMT Inc 2	109-82696	3,000 Swine - 55 lbs. or More

Table 5.53C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
City of Rochester and surrounding townships	98,064	Mandatory

5.53D. Monthly Fecal Coliform Loading Capacities and Allocations - South Fork Zumbro River; Salem Creek to Bear Creek (AUID: 07040004-536)

Drainage Area (square miles):	157					
USGS gage used to develop flow zones and loading capacities: South Fork Zumbro River at Rochester						
% MS4 Urban:	4%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		54.78	24.43	13.15	7.51	2.69
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements		1.80	0.68	0.44	0.19	0.06
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		41.82	15.94	10.21	4.40	1.45
Margin of Safety		11.16	7.81	2.49	2.92	1.18
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0%	0%	0%	0%	0%
Communities Subject to MS4 NPDES Requirements		3%	3%	3%	3%	2%
Livestock Facilities Requiring NPDES Permits		0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems		0%	0%	0%	0%	0%
Load Allocation		76%	65%	78%	59%	54%
Margin of Safety		20%	32%	19%	39%	44%

5.54 Salem Creek; lower 15 miles; class 2C portion to South Fork Zumbro River (AUID: 07040004-503)

The 17-mile reach of Salem Creek to the confluence with the South Fork Zumbro River was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 62 square miles. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (80%), and contains just 3% rural and suburban residential/commercial. The watershed does not include any permitted wastewater treatment facility discharges (Table 5.54A) or livestock facilities that have been issued NPDES permits (Table 5.54B). There are no communities that will require coverage under MS4 permits at this time (Table 5.54C).

Table 5.54D describes the monthly fecal coliform loading capacities for this reach of the Zumbro River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Zumbro River at Rochester as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.54A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
none			

Table 5.54B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.54C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

5.54D. Monthly Fecal Coliform Loading Capacities and Allocations - Salem Creek; lower 15 miles; class 2C portion to South Fork Zumbro River (AUID: 07040004-503)

Drainage Area (square miles):	62					
USGS gage used to develop flow zones and loading capacities: South Fork Zumbro River at Rochester						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		21.73	9.69	5.22	2.98	1.07
Wasteload Allocation						
Permitted Wastewater Treatment Facilities	0.00	0.00	0.00	0.00	0.00	0.00
Communities Subject to MS4 NPDES Requirements	0.00	0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits	0	0	0	0	0	0
"Straight Pipe" Septic Systems	0	0	0	0	0	0
Load Allocation	17.30	6.59	4.23	1.82	0.60	
Margin of Safety	4.43	3.10	0.99	1.16	0.47	
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities	0%	0%	0%	0%	0%	0%
Communities Subject to MS4 NPDES Requirements	0%	0%	0%	0%	0%	0%
Livestock Facilities Requiring NPDES Permits	0%	0%	0%	0%	0%	0%
"Straight Pipe" Septic Systems	0%	0%	0%	0%	0%	0%
Load Allocation	80%	68%	81%	61%	56%	
Margin of Safety	20%	32%	19%	39%	44%	

5.55 Cedar River, Rose Creek to Woodbury Creek (AUID: 07080201-501)

The 10-mile reach of the Cedar River from Rose Creek to Woodbury Creek was added to the Section 303(d) Clean Water Act impaired waters list in 1998. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 544 square miles. This represents most of the Cedar River watershed in Minnesota and includes portions of Mower, Freeborn, and Steele counties. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (87%), much of which has surface (ditches) and subsurface (tile) drainage. The watershed includes 10 communities served by permitted wastewater treatment facilities (Table 5.55A); and 13 livestock facilities that have been issued NPDES permits (Table 5.55B). Approximately 7,000 acres of the City of Austin, or 2% of the watershed, will require coverage under MS4 permits (Table 5.55C). An additional 2% of the watershed area contains smaller towns and rural residences.

Table 5.55D describes the monthly fecal coliform loading capacities for this reach of the Cedar River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Cedar River near Austin as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations

Table 5.55A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Lansing Township WWT Improvements	MN0063461	0.026	0.006
Blooming Prairie WWTP	MN0021822	0.899	0.20
Brownsdale WWTP	MN0022934	0.184	0.04
Elkton WWTP	MNG580013	0.017	0.004
Hollandale WWTP	MN0048992	0.0427	0.01
Austin WWTP	MN0022683	8.475	1.92
Oakland Sanitary District WWTP	MN0040631	0.0121	0.003
Sargeant WWTP	MN0021601	0.0106	0.002
Waltham WWTP	MN0025186	0.027	0.01
Rose Creek WWTP	MNG580072	0.065	0.01
Totals		9.76	2.22

Table 5.55B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Roland Kittleson Farm	039-50003	3,600 Swine - 55 lbs. or More

Dennis Magnuson & MHF Free Co - Sec 35	047-96992	11,500 Swine - 55 lbs. or More
Dennis Magnuson Farm	047-50008	8,350 Swine - 55 lbs. or More
Dennis Magnuson Farm - Sec 35 NE	047-96991	14,780 Swine Under 55 lbs.
Hanson Hog Farm	047-96951	3,000 Swine - 55 lbs. or More
Natural Pork Production II LLP - Austin	047-50005	3,830 Swine - 55 lbs. or More
North Farm	047-50007	8,350 Swine - 55 lbs. or More
Bob Bartel Farm Sec 22	099-60649	4,800 Swine - 55 lbs. or More
Geo A Hormel & Co Farm	099-83267	6,000 Swine - 55 lbs. or More
John Nielsen Farm - Site 2	099-93981	3,600 Swine - 55 lbs. or More
Paul Meany Farm - Sec 15	099-50001	3,840 Swine - 55 lbs. or More
Yunker Farms	099-83464	4,000 Swine - 55 lbs. or More
MJC Farms	147-50001	3,180 Swine - 55 lbs. or More

Table 5.55C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Austin	23,314	Designated by rule; > 10,000 population

Table 5.55D. Monthly Fecal Coliform Loading Capacities and Allocations - Cedar River, Rose Creek to Woodbury Creek (AUID: 07080201-501)

Drainage Area (square miles):	544				
USGS gage used to develop flow zones and loading capacities:	Cedar River near Austin				
% MS4 Urban:	2%				
Total WWTF Design Flow (mgd):	9.7584				
	Flow Zones				
	High	Moist	Mid	Dry	Low
	values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY	195.38	73.42	34.36	17.30	9.45
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	2.22	2.22	2.22	2.22	2.22
Communities Subject to MS4 NPDES Requirements	2.92	0.88	0.47	0.18	0.08
Livestock Facilities Requiring NPDES Permits	0	0	0	0	0
"Straight Pipe" Septic Systems	0	0	0	0	0
Load Allocation	143.88	43.16	23.13	8.80	4.17
Margin of Safety	46.36	27.17	8.54	6.11	2.98
	values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY	100%	100%	100%	100%	100%
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	1.1%	3.0%	6.4%	12.8%	23.4%
Communities Subject to MS4 NPDES Requirements	1.5%	1.2%	1.4%	1.0%	0.9%
Livestock Facilities Requiring NPDES Permits	0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems	0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation	73.6%	58.8%	67.3%	50.8%	44.1%
Margin of Safety	23.7%	37.0%	24.9%	35.3%	31.5%

5.56 Cedar River, Roberts Creek to Upper Austin Dam (AUID: 07080201-502)

The 5-mile reach of the Cedar River from Roberts Creek to the Upper Austin Dam was added to the Section 303(d) Clean Water Act impaired waters list in 1998. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 185 square miles. This represents about 1/3 of the entire Cedar River watershed in Minnesota and includes portions of Mower, Freeborn, and Steele counties. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (89%), much of which has surface (ditches) and subsurface (tile) drainage. The watershed includes 3 communities served by permitted wastewater treatment facilities (Table 5.56A); and 3 livestock facilities that have been issued NPDES permits (Table 5.56B). There are no communities that will require coverage under a MS4 permit at this time (Table 5.56C), although 3% of the watershed consists of small towns and rural residential land.

Table 5.56D describes the monthly fecal coliform loading capacities for this reach of the Cedar River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Cedar River near Austin as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations

Table 5.56A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Lansing Township WWT Improvements	MN0063461	0.026	0.006
Blooming Prairie WWTP	MN0021822	0.899	0.20
Waltham WWTP	MN0025186	0.027	0.01
Totals		0.95	0.22

Table 5.56B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
Roland Kittleson Farm	039-50003	3,600 Swine - 55 lbs. or More
Bob Bartel Farm Sec 22	099-60649	4,800 Swine - 55 lbs. or More
MJC Farms	147-50001	3,180 Swine - 55 lbs. or More

Table 5.56C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
none		

Table 5.56D. Monthly Fecal Coliform Loading Capacities and Allocations - Cedar River, Roberts Creek to Upper Austin Dam (AUID: 07080201-502)

Drainage Area (square miles):	185					
USGS gage used to develop flow zones and loading capacities: Cedar River near Austin						
% MS4 Urban:	0%					
Total WWTF Design Flow (mgd):	0.952					
		Flow Zone				
		High	Moist	Mid	Dry	Low
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		66.38	24.95	11.67	5.88	3.21
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.22	0.22	0.22	0.22	0.22
Communities Subject to MS4 NPDES Requirements		0.00	0.00	0.00	0.00	0.00
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0
"Straight Pipe" Septic Systems		0	0	0	0	0
Load Allocation		50.41	15.50	8.55	3.58	1.98
Margin of Safety		15.75	9.23	2.90	2.08	1.01
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		0.3%	0.9%	1.9%	3.7%	6.7%
Communities Subject to MS4 NPDES Requirements		0.0%	0.0%	0.0%	0.0%	0.0%
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		75.9%	62.1%	73.3%	60.9%	61.8%
Margin of Safety		23.7%	37.0%	24.9%	35.4%	31.5%

**5.57 Shell Rock River; Albert Lea Lake to Goose Creek
(AUID: 07080202-501)**

The 12-mile reach of the Shell Rock River from Albert Lea Lake to Goose Creek was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 195 square miles. Land use in the watershed upstream of the impairment (Table 2.1) is dominated by cultivated land (76%), but compared to the other impaired reach watersheds in the basin, exhibits a relatively high percentage of water and wetlands. The watershed includes 4 communities and a state park served by permitted wastewater treatment facilities (Table 5.57A). No livestock facilities that have been issued NPDES permits are located in the watershed (Table 5.57B). Approximately 8,000 acres of the City of Albert Lea, or 6% of the watershed, will require coverage under MS4 permits (Table 5.57C).

Table 5.57D describes the monthly fecal coliform loading capacities for this reach of the Shell Rock River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Shell Rock River near Northwood, IA as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations. It is possible that Albert Lea Lake functions to reduce downstream bacteria loading. As such, some focus on sources downstream of Albert Lea Lake may lead to greater water quality improvements on the impaired river reach.

Table 5.57A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	Facility Class
Clarks Grove WWTP	MNG580067	0.1164	0.026
Albert Lea WWTP	MN0041092	18.38	4.17
Glenville WWTP	MN0021245	0.13	0.03
Hayward WWTP	MN0041122	0.045	0.010
MDNR Myre Big Island State Park	MN0033740	0.01	0.002
Totals		18.68	4.24

Table 5.57B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.57C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Albert Lea	18,356	mandatory

Table 5.57D. Monthly Fecal Coliform Loading Capacities and Allocations - Shell Rock River; Albert Lea Lake to Goose Creek (AUID: 07080202-501)

Drainage Area (square miles):	195				
USGS gage used to develop flow zones and loading capacities: Shell Rock River near Northwood, IA					
% MS4 Urban:	6%				
Total WWTF Design Flow (mgd):	18.6814				
	Flow Zone				
	High	Moist	Mid	*Dry	*Low
	values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY	56.33	25.28	11.55	3.88	1.63
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	4.24	4.24	4.24	*	*
Communities Subject to MS4 NPDES Requirements	2.70	0.72	0.25	*	*
Livestock Facilities Requiring NPDES Permits	0	0	0	0.00	0.00
"Straight Pipe" Septic Systems	0	0	0	0.00	0.00
Load Allocation	39.39	10.47	3.60	*	*
Margin of Safety	9.99	9.85	3.46	na	na
	values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY	100%	100%	100%	100%	100%
Wasteload Allocation					
Permitted Wastewater Treatment Facilities	7.5%	16.8%	36.7%	*	*
Communities Subject to MS4 NPDES Requirements	4.8%	2.8%	2.1%	*	*
Livestock Facilities Requiring NPDES Permits	0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems	0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation	69.9%	41.4%	31.2%	*	*
Margin of Safety	17.7%	39.0%	30.0%	na	na

*note - WWTF design flow exceeded dry and low flow; Allocation = (flow contribution from source) X (200 orgs./100ml.); see Sect. 5.1

**5.58 Vermillion River; South Br. Vermillion River to the Hastings Dam
(AUID: 07040001-506)**

The 12-mile reach of the Vermillion River from the confluence with the South Branch to the Hastings Dam was added to the Section 303(d) Clean Water Act impaired waters list in 1996. The primary source of data that led to this listing was the Metropolitan Council water monitoring program.

The drainage area to the downstream end of this impaired reach is 273 square miles. Land use in the watershed upstream of the impairment (Table 2.1) is just over 50% cultivated, and 26% residential, urban, and industrial. The balance is grassland, forest, water and wetland. The watershed includes four communities served by permitted wastewater treatment facilities (Table 5.58A), including the very large Empire facility. No livestock facilities that have been issued NPDES permits are located in the watershed (Table 5.58B). Approximately 32,000 acres, or 18% of the watershed, will require coverage under MS4 permits. This includes portions of a number of Twin Cities suburban communities, as well as some of the City of Hastings (Table 5.58C).

Table 5.58D describes the monthly fecal coliform loading capacities for this reach of the Vermillion River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Vermillion River near Empire as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.58A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Elko/New Market WWTP	MN0056219	0.98	0.22
Hampton WWTP	MN0021946	0.101	0.02
Met Council - Empire WWTP	MN0045845	28.61	6.50
Vermillion		0.054	0.01
Totals		29.745	6.75

Table 5.58B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.58C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Portions of the following communities fall within the impaired reach watershed:		
Apple Valley		mandatory
Burnsville		mandatory
Eagan		mandatory
Farmington		mandatory
Hastings		Designated by rule; > 10,000 population
Inver Grove Heights		mandatory
Lakeville		mandatory
Rosemount		mandatory
Empire Township		mandatory

Table 5.58D. Monthly Fecal Coliform Loading Capacities and Allocations - Vermillion River; South Br. Vermillion River to the Hastings Dam (AUID: 07040001-506)

Drainage Area (square miles):	273					
USGS gage used to develop flow zones and loading capacities: Vermillion River near Empire						
% MS4 Urban:	18%					
Total WWTF Design Flow (mgd):	29.745	Flow Zone				
		High	Moist	Mid	Dry	Low*
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		66.71	32.50	19.74	11.75	6.98
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		6.75	6.75	6.75	6.75	*
Communities Subject to MS4 NPDES Requirements		8.62	3.09	1.57	0.30	*
Livestock Facilities Requiring NPDES Permits		0	0	0	0	0.00
"Straight Pipe" Septic Systems		0	0	0	0	0.00
Load Allocation		38.41	13.76	7.02	1.32	*
Margin of Safety		12.93	8.90	4.39	3.38	na
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		10.1%	20.8%	34.2%	57.4%	*
Communities Subject to MS4 NPDES Requirements		12.9%	9.5%	8.0%	2.5%	*
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		57.6%	42.3%	35.6%	11.3%	*
Margin of Safety		19.4%	27.4%	22.2%	28.8%	na

* note - WWTF design flow exceeded low flow minus MOS; Allocation = (flow contribution from source) X (200 orgs./100ml.); see Sect. 5.1

5.59 Vermillion River; Below trout stream portion to South Br. Vermillion River (AUID: 07040001-507)

The 9-mile reach of the Vermillion River below the trout stream portions to the South Branch of the Vermillion River was added to the Section 303(d) Clean Water Act impaired waters list in 1994. The primary source of data that led to this listing was the MPCA Milestone long-term monitoring program.

The drainage area to the downstream end of this impaired reach is 142 square miles. Land use in the watershed upstream of the impairment (Table 2.1) is the most urban/suburban (33%) of impaired reach watershed covered in this report, although there is still a significant amount (42%) of cultivated land. The watershed includes two communities served by permitted wastewater treatment facilities (Table 5.59A), including the very large Empire facility. No livestock facilities that have been issued NPDES permits are located in the watershed (Table 5.59B). Approximately 26,000 acres, or 28% of the watershed, will require coverage under MS4 permits. This includes portions of a number of Twin Cities suburban communities, as well as some of the City of Hastings (Table 5.59C).

Table 5.59D describes the monthly fecal coliform loading capacities for this reach of the Vermillion River to achieve water quality standards, as well as the component wasteload allocations, load allocations, and margins of safety. The loading capacities were developed using flow data from the USGS gage site on the Vermillion River near Empire as described in Appendix A. Substantial reductions in fecal coliform loading from straight-pipe septic systems, and a variety of nonpoint sources will likely be required to meet the allocations.

Table 5.59A. Wastewater Treatment Facilities

Name/Location	Permit Number	Design Flow (mgd)	WLA (t-orgs./mo.)
Elko/New Market WWTP	MN0056219	0.98	0.22
Met Council - Empire WWTP	MN0045845	28.61	6.50
Totals		29.59	6.72

Table 5.59B. Livestock Facilities with NPDES Permits

Facility	ID Number	Description
none		

Table 5.59C. Municipal Separate Storm Sewer System (MS4) Communities

Community	Population Estimate	Category
Portions of the following communities fall within the impaired reach watershed:		
Apple Valley		mandatory
Burnsville		mandatory
Eagan		mandatory
Farmington		mandatory
Inver Grove Heights		mandatory
Lakeville		mandatory
Rosemount		mandatory
Empire Township		mandatory

5.59D. Monthly Fecal Coliform Loading Capacities and Allocations - Vermillion River; Below trout stream portion to South Br. Vermillion River (AUID: 07040001-507)

Drainage Area (square miles):	142					
USGS gage used to develop flow zones and loading capacities: Vermillion River near Empire						
% MS4 Urban:	28%					
Total WWTF Design Flow (mgd):	29.59					
		Flow Zone				
		High	Moist	Mid	Dry*	Low*
		values expressed as trillion organisms per month (tera- or T-org./month)				
TOTAL MONTHLY LOADING CAPACITY		34.79	16.95	10.29	6.13	3.64
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		6.72	6.72	6.72	*	*
Communities Subject to MS4 NPDES Requirements		5.99	1.57	0.36	*	*
Livestock Facilities Requiring NPDES Permits		0	0	0	0.00	0.00
"Straight Pipe" Septic Systems		0	0	0	0.00	0.00
Load Allocation		15.34	4.02	0.92	*	*
Margin of Safety		6.74	4.64	2.29	na	na
		values expressed as percent of total month loading capacity				
TOTAL MONTHLY LOADING CAPACITY		100%	100%	100%	100%	100%
Wasteload Allocation						
Permitted Wastewater Treatment Facilities		19.3%	39.6%	65.3%	*	*
Communities Subject to MS4 NPDES Requirements		17.2%	9.3%	3.5%	*	*
Livestock Facilities Requiring NPDES Permits		0.0%	0.0%	0.0%	0.0%	0.0%
"Straight Pipe" Septic Systems		0.0%	0.0%	0.0%	0.0%	0.0%
Load Allocation		44.1%	23.7%	9.0%	*	*
Margin of Safety		19.4%	27.4%	22.3%	na	na

*note - WWTF design flow exceeded dry and low flow; Allocation = (flow contribution from source) X (200 orgs./100ml.); see Sect. 5.1

5.3 Impacts of Growth on Allocations

Straight-Pipe Septic Systems

As a result of state and local rules, ordinances, and programs, the number of straight pipe septic systems will decrease over time. Because these systems constitute illegal discharges, they are not provided a load allocation for any of the impaired reaches covered in this report. As such, other elements of the TMDL allocation will not change as these systems are eliminated.

Wastewater Treatment Facilities

Flows at some wastewater treatment facilities are likely to increase over time with increases in the populations they serve. As long as current fecal coliform discharge limits are met at these facilities, however, such increases will not impact the allocation provided to other sources. This is because increased flows from wastewater treatment facilities add to the overall loading capacity by increasing river flows.

Municipal Separate Storm Sewer Systems

Expansion of some or all of the current MS4 communities in the basin is likely to take place. The City of Rochester, for example, predicts a 30-50% growth in population by 2030. Seventeen of the 39 impaired reach watersheds covered in this report contain at least a portion of a community required to have MS4 permit coverage. As expansion of these communities occurs, MS4 wasteload allocations may also need to be increased. If this occurs, the nonpoint source load allocation will need to be reduced proportionally. This makes sense, because expansion of urban areas effectively reduces the amount of agricultural and other land which contributes nonpoint source runoff.

Livestock

Along with humans, the other major source of fecal coliform in the basin is livestock. While there have been changes in the sizes and types of facilities, there do not appear to be clear trends in overall livestock numbers. With changes in facility size and type, a continuing shift in focus from the facilities themselves to land application practices may be warranted in the future. If growth in livestock numbers does occur, newer regulations for facility location and construction, manure storage design, and land application practices should help mitigate potential increases in fecal coliform loading to the streams and rivers of the basin.

For the reasons discussed above, no explicit adjustments were made to the waste load or load allocations to account for human or livestock population growth. The MPCA will monitor population growth, urban expansion, and changes in agriculture, and reopen the TMDLs covered in this report if and when adjustments to allocations may be required.

6.0 MARGIN OF SAFETY

Under section 303(d) of the Clean Water Act, a “margin of safety” (MOS) is required as part of a TMDL. The purpose of the MOS is to account for uncertainty that the allocations will result in attainment of water quality standards. For the 39 impaired reaches covered in this report, an explicit margin of safety is provided for each of the flow periods for each listed reach. As described in section 5 and Appendix A of this document, the MOS is based on the difference between the loading capacity as calculated at the mid-point of each of the five flow ranges, and the loading capacity calculated at the minimum flow in each zone. Given that the loading capacity is typically much less at the minimum flow of a zone as compared to the mid-point, a substantial MOS is provided. The MOS ensures that allocations will not exceed the load associated with the minimum flow in each zone. Because the allocations are a direct function of monthly flow, accounting for potential flow variability is the appropriate way to address the MOS. The minimum monthly flows over long periods of record at the USGS gage sites define the MOS for the low flow zone.

7.0 SEASONAL VARIATION

The flow duration approach utilized in this TMDL captures the full range of flow conditions over the April-October period when the fecal coliform water quality standard applies. Appendix A includes figures depicting the relationship between months (seasons) and the five flow zones for which wasteload allocations, load allocations, and margins of safety were calculated. In particular, Figure A-4 provides an example (for the Vermillion River) of the relationship between monthly flows and flow zones, and how the complete range of monthly flows is encompassed in the five flow zones.

8.0: MONITORING PLAN

8.1: Goals of the Monitoring Plan

The goal of this monitoring plan is to determine the effectiveness of the source reduction strategies that are implemented to attain water quality standards and designated uses. Even after these TMDLs are approved, the impaired reaches will effectively remain listed, as category 4A waters, until water quality standards for fecal coliform are met. Category 4A indicates that the waters are impaired but no longer need a TMDL.

8.2: Monitoring Activities, Schedule, and Responsibility

The MPCA maintains 10 long-term Minnesota Milestone sites in the basin. Grab sample monitoring at these stations occurs every three years at a frequency of once a month in order to collect a total of 16 samples over a five-year period. These sites will be

monitored in 2006. Seven are tributary sites and three are main stem Mississippi River sites.

A water quality assessment (305b), based on monitoring data collected within the previous ten years at these and other sites (maintained by Met Council, Corps of Engineers, etc.), is scheduled for 2009 and at five-year intervals thereafter. This baseline monitoring system will be used to assess whether streams of the basin are in full support, partial support, or nonsupport of designated water uses, based on concentrations of fecal coliform bacteria and other parameters.

A monitoring system for the Regional Fecal Coliform TMDL also will be used to evaluate progress in ambient water quality. This has a basinwide and targeted watershed component.

The basinwide component consists of a repetition of intensive monitoring of fecal coliform bacteria concentrations at Minnesota Milestone sites that took place in 1997/1998. This monitoring was conducted five times per month during the recreational use season, with monthly geometric means calculated to determine whether the standard of 200 org./100 ml was being exceeded or not. This will be repeated in 2007/2008 as part of the implementation plan.

In addition, targeted watersheds will be monitored in 2008/2009. In addition to comparing geometric monthly means from both time periods, a comparison will be made of samples taken at lower flows during dry weather periods, when continuous sources such as ISTS are believed to dominate fecal coliform loadings. This will be done in the following watersheds: Prairie Creek, Straight River, Vermillion River, Whitewater River, South Branch Root River, and Cedar River watersheds.

The MPCA will be responsible for implementing this monitoring plan, with assistance from partners in the target watersheds listed above.

9.0 IMPLEMENTATION

9.1: Current Implementation through Basinwide Source Reduction Strategies:

Directly pertinent to this project, BALMM (Basin Alliance for the Lower Mississippi in Minnesota) has embraced a basinwide goal of achieving water quality standards for fecal coliform bacteria. BALMM participants have developed detailed action strategies in the following areas to work toward this water quality goal:

- Feedlot Runoff Reduction: This strategy is being implemented in several ways. For feedlots of 300 animal units and smaller, the BALMM strategy consists mainly of maximizing participation in the Open Lot Agreement. This feature of state feedlot rules provides a framework for eligible producers to

phase into compliance by October 2005, achieve a 50 percent reduction in runoff and, by October 2010, achieve full compliance with runoff rules. Section 319 grants have been obtained to support participation in this program in the following counties: Dodge, Fillmore, Goodhue, Houston, Mower, Olmsted, Rice, Wabasha, and Winona. The projects are designed to provide counties with technical, educational and financial support to enroll 90 percent of eligible livestock farmers in the Open Lot Agreement, and ensure that effective feedlot fixes are designed and implemented. An estimated 2,200 farmers have been enrolled to date. Farmers also will be informed of manure management record-keeping and planning requirements, and of resources available to assist in these activities. Other counties in the basin are pursuing the same objectives using their own and other resources.

- Residential Wastewater Treatment. The BALMM strategy for Individual Sewage Treatment Systems (ISTS) calls for increasing the percentage of the population with properly functioning systems. This strategy is being implemented through several Section 319 grants. The projects address the impact of human sources of bacteria through a combination of education, technical assistance, and financial assistance to owners of failing ISTS. To this end, the BALMM, the Southeast Minnesota Water Resources Board, the Cannon River Watershed Partnership, and the University of Minnesota Extension Service have formed a partnership that will involve 12 of the 14 counties in the basin. The goal is to double the average rate at which ISTS classified as Imminent Public Health Threats (straight-pipes) are being corrected through local efforts across the basin, from 300 to 600 per year. By 2012, a sustained effort of this magnitude should achieve the target source reduction of 65 percent, cited in the original Regional Fecal Coliform TMDL. Both individual residents and unsewered communities will be addressed through the project. Additional funding has been sought to help to initiate county-based revolving loan programs to help to assist ISTS repairs, and to cost-share engineering studies needed to evaluate the feasibility of alternative community wastewater treatment options. Fillmore County is participating in a state-sponsored pilot project whose purpose is to identify and correct straight-pipe septic systems within 10 years. Lessons learned from this project will be shared with other counties in the basin.
- Accelerated Adoption of Rotational Grazing – This BALMM Strategy is being implemented in part through Section 319 grants. By assisting producers in the writing of managed rotational grazing plans, the projects will increase estimated acreage of this practice from 7,500 to almost 20,000 acres. It will also train local resource managers to continue helping beef and dairy farmers to convert from conventional to rotational grazing, with the goal of the latter becoming the dominant pasture management practice in the region.

Manure Management Planning – New feedlot rules require that manure management plans be developed for any feedlots that need a permit. These include the following categories of feedlots:

- Those with more than 300 animal units that are planning new construction or expansion;
- There is a pollution hazard that has not been corrected through the Open Lot Agreement;
- Feedlot has been designated as a CAFO (more than 1000 animal units or direct man-made conveyance to waters)
- Feedlot has more than 300 animal units and is applying manure in sensitive areas, including: a) soil P levels exceeding 120/150 ppm Olsen/Bray, or half those values within 300 feet of public waters; b) vulnerable drinking water supply management areas; or c) slopes exceeding 6 percent within 300 feet of waters.

The development of manure management plans for these feedlots should result in at least half the volume of manure in the basin being subject to manure management planning by 2005. This percentage will continue to increase thereafter. Practices that reduce fecal coliform runoff will be promoted for manure management plans within the project area, and may be required for CAFOs. The MPCA conducts annual inspections of NPDES permittees. This will include inspections of manure application records and manure management plans. For feedlots with 300 to 999 animal units, with interim permits or construction permits, counties are responsible for inspections of manure application records and manure management plans. Funding to support technical assistance and to provide producer incentives will be sought to maximize producer adoption of manure management plans.

- Landscape Buffer Initiative: This BALMM strategy includes as areas targeted for grass buffers agricultural fields that have been designated for manure application. The Conservation Reserve Enhancement Program (CREP) provides federal and state funding for 51,000 acres of conservation easements. These include riparian buffers which can play a crucial role in reducing polluted runoff from fields where manure is applied.
- Conservation Tillage Strategy: Conservation tillage is a cost-effective way to reduce field runoff. Where manure is applied to cropland, the need for prompt incorporation must be balanced against the need to maintain surface residue cover for erosion control. With support from a Section 319 Grant, the University of Minnesota in spring 2002 published a document entitled, "Tillage Best Management Practices for Water Quality Protection in Southeastern Minnesota." This publication is being used to promote conservation tillage in the context of manure management to reduce field runoff.
- Urban Stormwater: BALMM Strategy 4A, page 102-103, Basin Plan Scoping Document, describes a comprehensive strategy for stormwater runoff control in the basin.

- Municipal Wastewater Treatment: All permitted facilities are required to disinfect wastewater effluent to meet discharge standards. Biosolids management requirements are designed to minimize the potential for runoff to surface water or infiltration into ground water of pollutants, including fecal coliform bacteria. In addition to these standard measures, the MPCA has identified facilities where sewage bypasses following storm events are a recurring problem. These are: Claremont, Kasson, and West Concord - all in the Middle Fork Zumbro River watershed. These facilities have been upgraded and no longer experience chronic bypass problems.

9.2: Review and Revision of Current Implementation Plan:

Upon approval of this revised TMDL study, the MPCA will review and update the current Implementation Plan. This process of review and update will include additional data analysis, as well as input from the public and other stakeholders. Key elements of this process will include:

- Additional reach-by-reach data analysis to help define the magnitude and timing of needed fecal coliform reductions, and the specific sources that will need to make these reductions. Local stakeholder involvement will be critical as most reductions will likely need to come from “load allocation” sources where local programs and watershed projects have a greater influence than state-level regulation. A proposal is being considered by the Southeast Minnesota Water Resources Board (SEMWRB) whereby Local Water Plans could be amended to reflect targets established as part of the TMDL implementation plan.
- State and local level planning to address “straight-pipe” septic systems, which are now considered point sources. The proposal being considered by the SEMWRB would convene a work team that will develop recommendations by June 2006. This team would draw on the experience of the three counties currently involved in a pilot project to inventory, and require compliance of, septic systems that pose an imminent threat to public health or safety. All “straight-pipe” septic systems fall into this category.
- A process to ensure that Stormwater Pollution Prevention Plans (SWPPPs), as required by Municipal Separate Storm Sewer System (MS4) permits, contain appropriate provisions to address fecal coliform bacteria impairments. A team that would operate in parallel to the one addressing “straight-pipe” septic systems is also being proposed. The new State Stormwater Manual, found at (<http://www.pca.state.mn.us/water/stormwater/stormwater-manual.html>) will be an important resource for this work.
- The establishment of specific goals, with timelines and progress report dates, for the ultimate elimination of “straight-pipe” septic systems, and the improvement of open feedlots with pollution hazards as required by state feedlot rules.

10.0 REASONABLE ASSURANCE

10.1 Evidence of BMP Implementability

The source-reduction strategies listed above have been shown to be efficacious in reducing pathogen transport and survival, and to be capable of widespread adoption by land owners and local resource managers.

- Feedlot runoff controls – these are evaluated by professional engineers through the Feedlot Evaluation Model referenced in Minn. R. ch. 7080. These rules are implemented by MPCA staff and by local staff of counties via a delegation agreement with the Agency. All counties except one (Olmsted) in the basin are so delegated. Olmsted County Extension is implementing certain facets of the new feedlot rules – Registration and Certification for the Open Lot Agreement.
- Individual Sewage Treatment Systems – ISTS with proper drain fields provide virtually complete treatment of fecal coliform bacteria. Straight-pipe septics discharge untreated wastewater to surface water. Acceptable designs are described in Minn. R. ch. 7020. All counties in the basin are delegated to implement these rules, which require conformance with state standards for new construction and disclosure of the state of the ISTS when property transfers ownership. Several counties require ISTS upgrades at property transfer.
- Municipal Wastewater Disinfection – Disinfection with chlorine or ultraviolet radiation is required of all NPDES permittees. In pond systems, which must meet the same fecal coliform discharge limit as other wastewater treatment systems, disinfection is generally passive with sunlight providing the ultraviolet radiation.
- Land Application of Manure – Buffer strips, immediate incorporation, and maintenance of surface residue have been demonstrated to reduce manure and pathogen runoff (Environmental Quality Board, General Environmental Impact Statement for Feedlots). The new state feedlots rules (Minn. R. ch. 7020) require manure application record-keeping and manure management planning, with the exact requirements differing according to size of operation and pollution risk of application, based on method, time and place of application.
- Erosion Control and Sediment Reduction – Conservation tillage and riparian buffer strips have been demonstrated to be effective in reducing sediment delivery to streams. Since embedded sediment can serve as a substrate for fecal coliform survival, reduction of sediment sources is considered an effective measure for controlling fecal coliform bacteria in streams.
- Planned Rotational Grazing: Sovell, et. al. 2000, demonstrated that rotational grazing, in contrast to conventional grazing, significantly reduces both

sedimentation and fecal coliform concentrations in water downstream of study sites in southeastern Minnesota.

- Urban Stormwater Management: Practices such as runoff detention, infiltration, and street sweeping have been shown to be effective in reducing urban runoff and associated pollutants. Twenty-six MS4 communities in the basin will be required to have a Phase II Stormwater Management Plan.

10.2 Non-Regulatory, Regulatory, and Incentive-Based Approaches

The above implementation strategies are included in the BALMM Basin Plan Scoping Document and are in the process of being implemented, often with support from federal grants. Several of the strategies build upon a solid foundation of state rules (feedlots, manure management, ISTS, stormwater, and municipal wastewater and biosolids) and county-delegated programs as a delivery system for technical and financial support and rule enforcement. Others will be pursued through strictly voluntary programs, such as promotion of buffers, rotational grazing, and conservation tillage. In the latter cases, BALMM strategies work through local delivery systems for technical and financial assistance, and are based on effective inter-agency collaboration. For these reasons, there is a high degree of “reasonable assurance” that source reduction strategies for this TMDL will be implemented within the near to mid-term future – the BALMM Basin Plan Scoping Document, on which all the strategies are based, calls for full implementation by 2010.

11.0 PUBLIC PARTICIPATION

11.1 Description of Public Participation Processes

Opportunity for public participation in developing the Revised TMDL will be afforded through a 30-day public comment period extending from Sept. 12 – Oct. 12, 2005. An extensive list of local and state level stakeholders were informed by a public notice mailing. A news release was issued to major media in the state. The public also was notified through an announcement in the State Register. The Revised TMDL was posted on the MPCA web site. The MPCA will provide responses to all written comments received before the close of the public notice period. These responses will be included in the Appendix.

12.0 REFERENCES

- Basin Alliance for the Lower Mississippi in Minnesota, 2001. "Lower Mississippi River Basin Plan Scoping Document," Minnesota Pollution Control Agency, St. Paul.
- Baxter-Potter, W, and M. Gilliland. 1988 "Bacterial Pollution in Runoff From Agricultural Lands," J. Environmental Quality, 17(1): 27-34.
- Cannon River Watershed Partnership, Minnesota Pollution Control Agency, Minnesota Center for Environmental Advocacy, and Steele County. 2001. A computation of the Straight River's TMDL of Fecal Coliform Bacteria.
- Chapman, Allen K., 2000. Fecal Coliform Pollution in the Straight River: An Information Assessment, Minnesota Center for Environmental Advocacy, November 2000.
- Dakota County Soil and Water Conservation District. 2004. Vermillion River Watershed Fecal Coliform Bacteria Study.
- Fillmore County, "Watershed News: South Branch of the Root River Watershed Project," Fall 1999, April 2000, and November 2000 issues.
- Helsel, D.R., and R.M. Hirsch 1991. Statistical Methods in Water Resources. U.S. Geological Survey.
- Howell, J. et al. 1996. "Effect of Sediment Particle Size and Temperature on Fecal Bacteria Mortality Rates and the Fecal Coliform/Fecal Streptococci Ratio". J. Environmental Quality. 25: 1216 - 1220
- McMurry, S., *et al.* 1998. "Fecal Coliform Transport Through Intact Soil Blocks Amended with Poultry Manure," J. Environ. Quality. 27: 86 – 92.
- Minnesota Environmental Quality Board. 2002. Generic Environmental Impact Statement on Animal Agriculture.
- Minnesota Pollution Control Agency, 2002. Regional Total Maximum Daily Load Evaluation of Fecal Coliform Bacteria Impairments in the Lower Mississippi River Basin in Minnesota.
- Minnesota Pollution Control Agency, 1999. Fecal Coliform Bacteria in Rivers, January 1999.
- Minnesota Pollution Control Agency, 1997. Lake Byllesby Assessment, 1996, Byllesby Reservoir," Publication ID #19-0006, December 1997

Morrison, David, 1999. "Vermillion River Watershed Citizen Monitoring Fecal Coliform Bacteria Monitoring Project, May-September 1999," unpublished presentation.

Morrison, David, 1999. "Contributions from Septic Systems and Undersewered Communities." Presented at Bacteria in the Minnesota River, Mankato, Minnesota, February 16, 1999.

Sovell, Laurie, *et al.*, 2000 "Impacts of Rotational Grazing and Riparian Buffers on Physicochemical and Biological Characteristics of Southeastern Minnesota, USA, Streams" *Environmental Management*, 26(6) 629 – 641.

University of Minnesota, "Lower Mississippi River Basin Information Page", Department of Soil, Water and Climate. <http://www.soils.agri.umn.edu/research/seminn/>

University of Minnesota. 2002. Tillage Best Management Practices for Water Quality Protection in Southeastern Minnesota.

U.S. Environmental Protection Agency 2004. Water Quality Standards for Coastal and Great Lakes Recreation Water.

U.S. Environmental Protection Agency. 2001. Protocol for Developing Pathogen TMDLs. EPA 841-J-00-002. Office of Water (4503F), United States Environmental Protection Agency, Washington, DC. 132 pp.

Waters, Tom, 1977, Streams and Rivers of Minnesota, University of Minnesota Press, Minneapolis

APPENDIX A: Loading Capacity Determination

APPENDIX B: U.S. District Court Decision

APPENDIX C: Letter from USEPA

APPENDIX D: E-mail from USEPA

APPENDIX E: Responses to Comments Received During Public Notice Period